

# PROFESSIONAL AIR TOOLS IN TAIWAN

*Herramientas  
Neumáticas en Taiwan*

台灣專業製造 氣動工具



| PROFESSIONAL | HIGH QUALITY |  
[www.alta-pro.com.tw](http://www.alta-pro.com.tw)

## Air Spray Gun / Pistola de Aire 噴槍

### JS-MRP-1808 JS-MH-1808

- Optional Nozzle :  
1.3, \*1.4, 1.7, 1.9, 2.1, 2.5mm
- Cup Capacity :  
600 C.C Gravity Nylon Cup
- Gun Weight : 448 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. :  
10Kgs/ G..W.:11 Kgs/ 2.0'



Item No. 型號	JS-MRP1808 Reduced Pressure	JS-MH 1808
Type	LVMP 中壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	170	145
Pattern Width 噴幅 (m/m)	270	270
Air Cons. 耗氣量 (l/Min.)	240	250
Air Pressure 使用壓力 (PSI)	15~28	15~28

### JS-M-1314 JS-MH-1314 JS-M-L1314

- Optional Nozzle :  
1.2, 1.3,\*1.4, 1.6, 1.8, 2.0, 2.5mm
- Cup Capacity :  
600 C.C Gravity Nylon Cup
- Gun Weight : 448 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. :  
10Kgs/ G..W.:11 Kgs/ 1.7'



Item No. 型號	JS-M 1314	JS-MH 1314	JS-M L1314
Type	HP 高壓	HVLP 環保型	LVLP 環保優型
Fluid Output 出漆量 (l/Min)	220	150	140
Pattern Width 噴幅 (m/m)	310	310	310
Air Cons. 耗氣量 (l/Min.)	210	270	270
Air Pressure 使用壓力 (PSI)	30~45	15~28	15~28

### JS-G-1325

- Optional Nozzle :  
0.8, 1.1, 1.3,\*1.4, 1.5,1.8, 2.0, 2.5 mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 440 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 10 Pcs / Ctn / N.W. :  
11Kgs/ G..W.:12 Kgs/ 1.7'



Item No. 型號	JS-G1325
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	190
Pattern Width 噴幅 (m/m)	260
Air Cons. 耗氣量 (l/Min.)	190
Air Pressure 使用壓力 (PSI)	30~45

### JS-S-1325

- Optional Nozzle :  
0.8, 1.1, 1.3, 1.4, 1.5,  
\*1.8, 2.0, 2.5 mm
- Cup Capacity :  
700 C.C or 1000C.C Suction Cup
- Gun Weight : 440 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8" or 1/4" NPS
- Package : 10 Pcs / Ctn / N.W. :  
13Kgs/ G..W.:14 Kgs/ 1.7'



Item No. 型號	JS-S1325
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	190
Pattern Width 噴幅 (m/m)	265
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45

**JS-S-1003  
JS-SH-1003**

- Optional Nozzle : 1.0, 1.2, 1.3, \*1.4, 1.5, 1.6, 1.8, 2.0, 2.5mm
- Cup Capacity : 1000 C.C Alu. Suction Cup
- Gun Weight : 514 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. : 14Kgs/ G..W.:15 Kgs/ 1.7'



**JS-KS-502**



**JS-KS-503**



Item No. 型號	JS-S 1003	JS-SH 1003
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	220	130
Pattern Width 噴幅 (m/m)	310	300
Air Cons. 耗氣量 (l/Min.)	210	210
Air Pressure 使用壓力 (PSI)	30~45	15~28

JS-KS 502 Airless Spray Gun	
MAX PRESSURE	490 BAR ( 7000 PSI )
Trigger	2 Finger Trigger
Handle	New Pistol grip Handle
Inlet Swivel	Convenient Swivel at inlet
Trigger Lock	Convenient Right and Left Hand trigger Lock
Nozzle	M17.5(11/16") x 16 P, M22 (7/8") x 14 P
Fluid Fitting	1/4 BPS x 19 P, 1/4 NPS x 18P, M 16 x 1.5P

JS-KS503 Airless Spray Gun	
MAX PRESSURE	490 BAR ( 7000 PSI )
Trigger	2 Finger Trigger
Handle	New Pistol grip Handle
Inlet Swivel	Convenient Swivel at inlet
Trigger Lock	Convenient Right and Left Hand trigger Lock
Nozzle	M17.5(11/16") x 16 P, M22 (7/8") X 14 P
Fluid Fitting	1/4 BPS x 19 P, 1/4 NPS x 18P, M 16 x 1.5P

**JS-M-1008  
JS-MH-1008  
JS-ML-1008**

- Optional Nozzle : 1.0, 1.3,\*1.4, 1.5, 1.7, 2.0, 2.5, 3.0, 3.5mm
- Cup Capacity : 600 C.C Gravity Nylon Cup
- Gun Weight : 620 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. : 11Kgs/ G..W.:12 Kgs/ 1.7'



**JS-S-1008  
JS-SH-1008**

- Optional Nozzle : 1.0, 1.3,\*1.4, 1.5, 1.7, 2.0, 2.5,3.0mm
- Cup Capacity : 1000 C.C Alu. Suction Cup
- Gun Weight : 630 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. : 11Kgs/ G..W.:12 Kgs/ 1.7'



Item No. 型號	JS-M 1008	JS-MH 1008	JS-ML 1008
Type	HP 高壓	HVLP 環保型	LVL 環保優型
Fluid Output 出漆量 (l/Min)	210	145	130
Pattern Width 噴幅 (m/m)	270	300	300
Air Cons. 耗氣量 (l/Min.)	190	250	250
Air Pressure 使用壓力 (PSI)	30~45	15~28	15~28

Item No. 型號	JS-S 1008	JS-SH 1008
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	220	185
Pattern Width 噴幅 (m/m)	310	300
Air Cons. 耗氣量 (l/Min.)	210	260
Air Pressure 使用壓力 (PSI)	30~45	15~28

## Air Spray Gun / Pistola de Aire 噴槍

### FORGED BODY-ALLOY

陽極鋁造槍體


JS-MH-1768  
JS-MH-1806  
JS-ML-1768  
JS-ML-1806

- Optional Nozzle : 1.3, \*1.4, 1.5, 1.7, 2.0, 2.5 mm
- Cup Capacity : 600 C.C Gravity Nylon Cup
- Gun Weight : 620 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. : 10Kgs/ G..W.:11 Kgs/ 1.7'



JS-M-1014  
JS-MH-1014  
JS-ML-1014

- Optional Nozzle : 1.0, 1.2, 1.3, \*1.4, 1.5, 1.6, 1.8, 2.0, 2.5mm
- Cup Capacity : 600 C.C Gravity Nylon Cup
- Gun Weight : 514 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. : 10Kgs/ G..W.:11 Kgs/ 1.7'

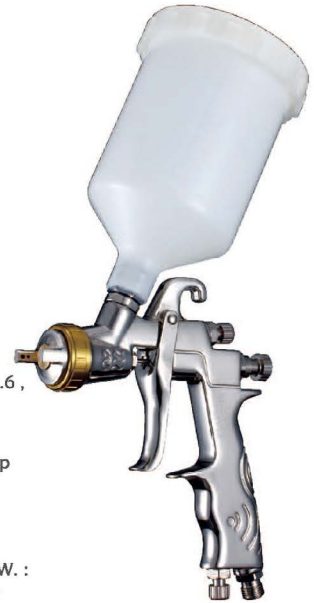

Item No. 型號	JS-MH 1768 JS-MH 1806	JS-ML 1768 JS-ML 1806
Type	HVLP 環保型	LVL 環保優型
Fluid Output 出漆量 (l/Min)	140	130
Pattern Width 噴幅 (m/m)	300	300
Air Cons. 耗氣量 (l/Min.)	260	250
Air Pressure 使用壓力 (PSI)	15~28	15~28

Item No. 型號	JS-M 1014	JS-MH 1014	JS-ML 1014
Type	HP 高壓	HVLP 環保型	LVL 環保優型
Fluid Output 出漆量 (l/Min)	220	150	140
Pattern Width 噴幅 (m/m)	310	310	310
Air Cons. 耗氣量 (l/Min.)	210	270	270
Air Pressure 使用壓力 (PSI)	30~45	15~28	15~28

JS-M-1566  
JS-MH-1788  
JS-ML-1788

- Optional Nozzle : 1.0, 1.3, \*1.4, 1.5, 1.7, 2.0, 2.5, 3.0, 3.5mm
- Cup Capacity : 600 C.C Gravity Nylon Cup
- Gun Weight : 620 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. : 10Kgs/ G..W.:11 Kgs/ 1.7'



Item No. 型號	JS-M 1566	JS-MH 1788	JS-ML 1788
Type	HP 高壓	HVLP 環保型	LVL 環保優型
Fluid Output 出漆量 (l/Min)	220	140	130
Pattern Width 噴幅 (m/m)	260	300	300
Air Cons. 耗氣量 (l/Min.)	200	260	250
Air Pressure 使用壓力 (PSI)	30~45	15~28	15~28

JS-S-1566  
JS-S-1788

- Optional Nozzle : 1.0, 1.3, 1.4, 1.5, \*1.7, 2.0, 2.5, 3.0mm
- Cup Capacity : 1000 C.C Alu.Suction Cup
- Gun Weight : 630 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. : 14Kgs/ G..W.:15 Kgs/ 1.7'



Item No. 型號	JS-S 1566	JS-S 1788
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	220	185
Pattern Width 噴幅 (m/m)	310	300
Air Cons. 耗氣量 (l/Min.)	210	250
Air Pressure 使用壓力 (PSI)	30~45	15~28

### JS-G-1706

- Optional Nozzle: 0.8, 1.0, 1.3, \*1.5, 1.8, 2.0, 2.5mm
- Cup Capacity: 400 C.C Gravity Cup
- Gun Weight: 365g
- Air Inlet: 1/4" PF
- Fluid Inlet: 1/4" NPS
- Package: 20 Pcs / Ctn / N.W.: 18Kgs/ G.W.:19 Kgs/ 2.5'



### JS-S-1706

- Optional Nozzle: 0.8, 1.0, 1.3, \*1.5, 1.8, 2.0, 2.5 mm
- Cup Capacity: 700 or 1000 C.C Suction Cup
- Gun Weight: 365g
- Air Inlet: 1/4" PF
- Fluid Inlet: 1/4" or 3/8" NPS
- Package: 10 Pcs / Ctn / N.W.: 11Kgs/ G.W.:12Kgs/ 2.2'

### JS-MHA-1768

- Optional Nozzle: 1.3, \*1.4, 1.5, 1.7, 2.0, 2.5 mm
- Cup Capacity: 600 C.C Gravity Nylon Cup
- Gun Weight: 620g
- Air Inlet: 1/4" PF
- Fluid Inlet: M16 X 1.5 P
- Package: 10 Pcs / Ctn / N.W.: 10Kgs/ G.W.:11 Kgs/ 1.7'



### Forged Body-Alloy (陽極鍛造槍體)

Item No. 型號	JS-G 1706	JS-S 1706
Type	HP高壓	HP高壓
Fluid Output 出漆量 (l/Min)	210	190
Pattern Width 噴幅 (m/m)	280	280
Air Cons. 耗氣量 (l/Min.)	220	200
Air Pressure 使用壓力 (PSI)	30~45	30~45

Item No. 型號	JS-MHA 1768
Type	HVLV環保型
Fluid Output 出漆量 (l/Min)	140
Pattern Width 噴幅 (m/m)	300
Air Cons. 耗氣量 (l/Min.)	260
Air Pressure 使用壓力 (PSI)	15~28

### JS-G-1105

- Optional Nozzle: 1.1, \*1.4, 1.8, 2.0 mm(HP)
- Cup Capacity: 400 C.C Gravity Cup
- Gun Weight: 480 g
- Air Inlet: 1/4" PF
- Fluid Inlet: 1/4" NPS
- Package: 20 Pcs / Ctn / N.W.: 19Kgs/ G.W.:20 Kgs/ 2.5'



### JS-S-1105

- Optional Nozzle: 0.8, 1.1, 1.4, 1.5, \*1.8, 2.0, 2.5 mm(HP)
- Cup Capacity: 1000 C.C Suction Cup
- Gun Weight: 480 g
- Air Inlet: 1/4" PF
- Fluid Inlet: 1/4" NPS
- Package: 10 Pcs / Ctn / N.W.: 19Kgs/ G.W.:20 Kgs/ 2.5'



Item No. 型號	JS-G1105
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	155
Pattern Width 噴幅 (m/m)	270
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45

Item No. 型號	JS-S1105
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	155
Pattern Width 噴幅 (m/m)	270
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45

# Air Spray Gun / Pistola de Aire 噴槍

JS-MG-1023  
JS-MG-1053  
JS-G-1023  
JS-G-1053

- Optional Nozzle : 0.5,\*0.8,1.0,1.2 mm
- Cup Capacity : 125 C.C Gravity Cup
- Gun Weight : 280 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M14 X 1.0 P
- Package : 20 Pcs / Ctn / N.W. : 14Kgs/ G..W.:15 Kgs/ 1.2'




Mini Jet  
小型噴槍

JS-M-1023  
JS-M-1053

JS-G-1605  
JS-G-1825

- Optional Nozzle : 1.1 , \*1.4 , 1.8 , 2.0 mm(HP)  
1.2 , \*1.4 , 1.7 , 2.0 mm(HVLP)
- Cup Capacity : 400 C.C Gravity Cup
- Gun Weight : 480 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. : 19Kgs/ G..W.:20 Kgs/ 2.5'

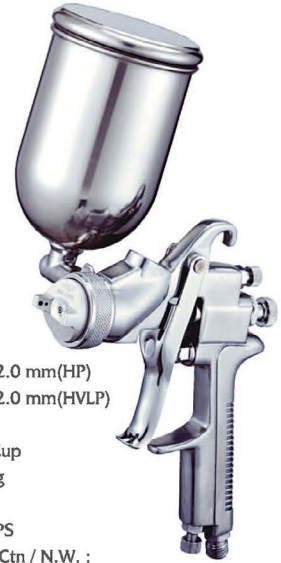

Suitable for small , narrow space spraying, repairing. 適用於小面積修補

Item No. 型號	JS-M 1023	JS-M 1053	JS-MG 1023	JS-MG 1053	JS-G 1023	JS-G 1053
Type	HP 高壓	HVLP 環保型	HP 高壓	HVLP 環保型	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	95	90	95	90	95	90
Pattern Width 噴幅 (m/m)	140	140	140	140	140 (Round)	140 (Round)
Air Cons. 耗氣量 (l/Min.)	90	109	90	109	90	109
Air Pressure 使用壓力 (PSI)	30~45	15~28	30~45	15~28	30~45	15~28

Item No. 型號	JS-G 1605	JS-G 1825
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	155	150
Pattern Width 噴幅 (m/m)	270	300
Air Cons. 耗氣量 (l/Min.)	200	250
Air Pressure 使用壓力 (PSI)	30~45	15~28

JS-M-1605  
JS-M-1825

- Optional Nozzle : 0.8, 1.1, \*1.4, 1.5, 1.8, 2.0, 2.5 mm(HP)  
1.2, 1.3, \*1.4, 1.7, 2.0, 2.4 mm(HVLP)
- Cup Capacity : 600 C.C Gravity Nylon Cup
- Gun Weight : 480 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. : 10Kgs/ G..W.:11 Kgs/ 1.7'



JS-S-1605  
JS-S-1825

- Optional Nozzle : 0.8,1.1, 1.4, 1.5, \*1.8 , 2.0, 2.5 mm(HP)  
1.2,1.3, 1.4,\*1.7, 2.0, 2.4 mm (HVLP)
- Cup Capacity : 1000 C.C Suction Cup
- Gun Weight : 480 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 10 Pcs / Ctn / N.W. : 19Kgs/ G..W.:20 Kgs/ 2.5'



Item No. 型號	JS-M 1605	JS-M 1825
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	155	150
Pattern Width 噴幅 (m/m)	270	300
Air Cons. 耗氣量 (l/Min.)	200	250
Air Pressure 使用壓力 (PSI)	30~45	15~28

Item No. 型號	JS-S 1605	JS-S 1825
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	155	150
Pattern Width 噴幅 (m/m)	270	300
Air Cons. 耗氣量 (l/Min.)	200	250
Air Pressure 使用壓力 (PSI)	30~45	15~28

JS-M-1968  
 JS-MH-1668  
 JS-ML-1668

- Optional Nozzle :  
1.0, 1.3, \*1.4, 1.5, 1.7, 2.0,  
2.5, 3.0, 3.5mm
- Cup Capacity :  
600 C.C Gravity Nylon Cup
- Gun Weight : 620 g
- Air Inlet : 1/4" PF
- Fluid Inlet : M16 X 1.5 P
- Package : 10 Pcs / Ctn / N.W. :  
10Kgs/ G..W.:11 Kgs/ 1.7'



Item No. 型號	JS-M 1968	JS-MH 1668	JS-ML 1668
Type	HP 高壓	HVLP 環保型	LVLP 環保優型
Fluid Output 出漆量 (l/Min)	210	145	130
Pattern Width 噴幅 (m/m)	270	300	300
Air Cons. 耗氣量 (l/Min.)	190	250	250
Air Pressure 使用壓力 (PSI)	30~45	15~28	15~28

JS-S-1968  
 JS-S-1668

- Optional Nozzle :  
1.0, 1.3, 1.4, 1.5,\*1.7, 2.0,  
2.5, 3.0, 3.5mm
- Cup Capacity :  
1000 C.C Suction Cup
- Gun Weight : 630 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8"NPS
- Package : 10 Pcs / Ctn / N.W. :  
14Kgs/ G..W.:15 Kgs/ 1.7'



Item No. 型號	JS-S 1968	JS-S 1668
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	210	185
Pattern Width 噴幅 (m/m)	270	300
Air Cons. 耗氣量 (l/Min.)	200	260
Air Pressure 使用壓力 (PSI)	30~45	15~28

JS-G-1006  
 JS-G-1106

- Optional Nozzle :  
0.8, 1.1, 1.3, \*1.4, 1.8, 2.0 mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 315 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
19Kgs/ G..W.:20 Kgs/ 2.5'



Item No. 型號	JS-G 1006	JS-G 1106
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	175	170
Pattern Width 噴幅 (m/m)	300	300
Air Cons. 耗氣量 (l/Min.)	240	230
Air Pressure 使用壓力 (PSI)	30~45	15~28

JS-S-1006  
 JS-S-1106

- Optional Nozzle :  
0.8, 1.1, 1.3, 1.4,\*1.8, 2.0 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 315 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" or 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
19Kgs/ G..W.:20 Kgs/ 2.5'



Item No. 型號	JS-S 1006	JS-S 1106
Type	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	150	140
Pattern Width 噴幅 (m/m)	300	300
Air Cons. 耗氣量 (l/Min.)	230	280
Air Pressure 使用壓力 (PSI)	30~45	15~28

## Air Spray Gun / Pistola de Aire 噴槍



### JS-G-1001

- Optional Nozzle :  
0.8 , 1.0,1.3,\*1.5 , 1.8 , 2.0 , 2.5mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 410g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
18Kgs/ G..W.:19 Kgs/ 2.5'

Item No. 型號	JS-G 1001
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	210
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	220
Air Pressure 使用壓力 (PSI)	30~45



### JS-S-1001

- Optional Nozzle :  
0.8 , 1.0,1.3,\*1.5 , 1.8 , 2.0 , 2.5 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 410 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" or 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
11Kgs/ G..W.:12 Kgs/ 2.2'

Item No. 型號	JS-S 1001
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	190
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



### JS-G-1888

- Optional Nozzle :  
0.8 , 1.0,1.3,\*1.5 ,  
1.8 , 2.0 , 2.5 mm
- Cup Capacity : 400 C.C Gravity Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
20Kgs/ G..W.:21 Kgs/ 2.5'

Item No. 型號	JS-G 1888
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	220
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45




### JS-S-1888

- Optional Nozzle :  
0.8 , 1.0,1.3,\*1.5 , 1.8 , 2.0 , 2.5 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" or 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
13Kgs/ G..W.:14 Kgs/ 2.2'

Item No. 型號	JS-S 1888
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	180
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



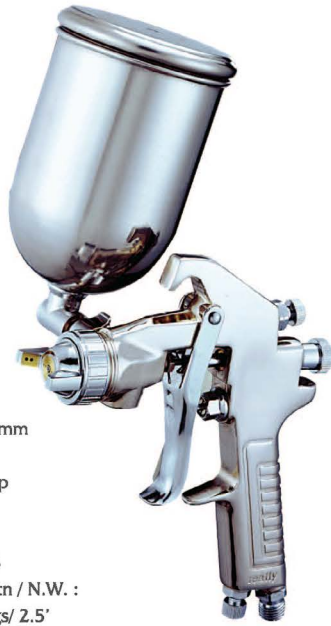

### JS-G-117

- Optional Nozzle :  
1.0, 1.3,\*1.5 , 1.8 mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
19Kgs/ G..W.:20 Kgs/ 2.5'

Item No. 型號	JS-G 117
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	200
Pattern Width 噴幅 (m/m)	270
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



### JS-S-117

- Optional Nozzle :  
1.0,1.3,\*1.5 , 1.8 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4"
- Package : 10 Pcs / Ctn / N.W. :  
11Kgs/ G..W.:12 Kgs/ 2'

Item No. 型號	JS-S 117
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	185
Pattern Width 噴幅 (m/m)	270
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



### JS-G-136

- Optional Nozzle :  
0.8,1.0,1.3,\*1.5 ,1.8, 2.0, 2.5 mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
19Kgs/ G..W.:20 Kgs/ 2.5'

Item No. 型號	JS-G 136
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	200
Pattern Width 噴幅 (m/m)	270
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



### JS-S-136

- Optional Nozzle :  
0.8,1.0,1.3,\*1.5 , 1.8,2.0,2.5 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 460 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" or 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
11Kgs/ G..W.:12 Kgs/ 2'

Item No. 型號	JS-S 136
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	180
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45

## Air Spray Gun / Pistola de Aire 噴槍



### JS-G-1195

- Optional Nozzle :  
1.0,\*1.4,1.6,2.0mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 520 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
20Kgs/ G..W.:21 Kgs/ 2.5'

Item No. 型號	JS-G 1195
Type	HVLP 環保型
Fluid Output 出漆量 (l/Min)	140
Pattern Width 噴幅 (m/m)	300
Air Cons. 耗氣量 (l/Min.)	260
Air Pressure 使用壓力 (PSI)	15~28



### JS-S-1195

- Optional Nozzle :  
1.0,\*1.4,1.6,2.0mm
- Cup Capacity :  
1000 C.C Suction Cup
- Gun Weight : 520 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
13Kgs/ G..W.:14 Kgs/ 1.7'

Item No. 型號	JS-S 1195
Type	HVLP 環保型
Fluid Output 出漆量 (l/Min)	140
Pattern Width 噴幅 (m/m)	300
Air Cons. 耗氣量 (l/Min.)	260
Air Pressure 使用壓力 (PSI)	15~28



### JS-G-1998

- Optional Nozzle :  
0.8, 1.0, 1.3,\*1.5, 1.8, 2.0, 2.5 mm
- Cup Capacity :  
400 C.C Gravity Cup
- Gun Weight : 450 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. :  
20Kgs/ G..W.:21 Kgs/ 2.5'

Item No. 型號	JS-G 1998
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	220
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	220
Air Pressure 使用壓力 (PSI)	30~45



### JS-S-1998

- Optional Nozzle :  
0.8, 1.0,1.3,\*1.5, 1.8, 2.0, 2.5 mm
- Cup Capacity :  
700 or 1000 C.C Suction Cup
- Gun Weight : 450 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" or 3/8" NPS
- Package : 10 Pcs / Ctn / N.W. :  
13Kgs/ G..W.:14 Kgs/ 2.2'

Item No. 型號	JS-S 1998
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	180
Pattern Width 噴幅 (m/m)	280
Air Cons. 耗氣量 (l/Min.)	200
Air Pressure 使用壓力 (PSI)	30~45



### JS-G-17

- Optional Nozzle : 1.2 mm
- Cup Capacity : 400 C.C Gravity Cup
- Gun Weight : 520 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 20 Pcs / Ctn / N.W. : 19Kgs/ G..W.:20 Kgs/ 2.5'

Item No. 型號	JS-G 17
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	110
Pattern Width 噴幅 (m/m)	160
Air Cons. 耗氣量 (l/Min.)	190
Air Pressure 使用壓力 (PSI)	30~45



- Optional Nozzle : 1.2 mm
- Cup Capacity : 700 C.C Suction Cup
- Gun Weight : 520 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS
- Package : 10 Pcs / Ctn / N.W. : 11Kgs/ G..W.:12 Kgs/ 2'

Item No. 型號	JS-S 17
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	110
Pattern Width 噴幅 (m/m)	160
Air Cons. 耗氣量 (l/Min.)	190
Air Pressure 使用壓力 (PSI)	30~45



### JS-S-1178

- Optional Nozzle : 25W & 10W
- Cup Capacity : 1000 C.C Suction Cup
- Gun Weight : 560 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 16MM(F)

Item No. 型號	JS-S 1178
Type	HP 高壓
Fluid Output 出漆量 (l/Min)	450
Pattern Width 噴幅 (m/m)	400
Air Cons. 耗氣量 (l/Min.)	230
Air Pressure 使用壓力 (PSI)	30~45

### AUTOMATIC SPRAY GUN

### JS-A-1001 JS-A-1002 JS-AH-1002

- Optional Nozzle : 0.8,\*1.0,1.3,1.5 mm (JS-A1001)
- Optional Nozzle : 1.0,\*1.2,1.4,1.5, 1.6,1.8,2.0 mm (JS-A1002, JS-AH1002)
- Gun Weight : 524 g
- Air Inlet : 1/4" PF
- Fluid Inlet : 1/4" NPS (JS-A1001) , 3/8" (JS-A1002,JS-AH2002)



With compact full size automatic air-spray gun for automated painting equipment, reciprocators or robotic painting. Offering multiple mounting and spraying options. 安裝於自動機臺.適用於皮革噴膠,冷卻等

Item No. 型號	JS-A1001	JS-A1002	JS-AH1002
Type	HP 高壓	HP 高壓	HVLP 環保型
Fluid Output 出漆量 (l/Min)	190	220	220
Pattern Width 噴幅 (m/m)	250	340	340
Air Cons. 耗氣量 (l/Min.)	270	270	290
Air Pressure 使用壓力 (PSI)	30~45	30~45	15~28

## Air Spray Gun / Pistola de Aire 噴槍

JS-A15

JS-A16

- Optional Nozzle : 1.0, 1.3, 2.0 mm
- Air Inlet : 1/8" PF
- Fluid Inlet : 1/8" NPS
- Gun Weight: 252g
- JS-A16 Pattern Adjustable



**AUTOMATIC SPRAY GUN**

With compact full size automatic air-spray gun for automated painting equipment, reciprocators or robotic painting. Offering multiple mounting and spraying options.

體積小、操作反應靈敏、霧化效果卓越。JS-A16噴槍上設有噴幅寬度調整旋鈕及噴量調整旋鈕，可選擇扇形噴幅或圓錐形噴幅，噴幅寬度亦可無段調整至適當位置及任意調整噴量大小，附360度旋轉的噴槍固定座。

適用於：自動機臺模具、離型劑噴塗、塑膠冷卻、廠房消毒加濕

Item No. 型號	JS-A15	JS-A16
Type	HP 高壓	HP 高壓
Fluid Output 出漆量 (l/Min)	NON	NON
Pattern Width 噴幅 (m/m)	300	300
Air Cons. 耗氣量 (l/Min.)	NON	NON
Air Pressure 使用壓力 (PSI)	30~45	30~45



**JS-401  
Dry Blow Gun**

- Reduce Drying Time To Increase Job Through-Out
- Excellent Solution For Water-Based Applications.
  - Ultra-Fine Filter Ensures Tip Quality Finish.
  - Simple To Use
  - 453 L/Min. ( 4 BAR )
  - Weight 440 G



**HVLP Air Spray Gun**

JS-S 1103-250

250C.C. Nylon Cup

JS-S 1103-1000

1000C.C. Alu. Suction Cup

- Optional Nozzle : 0.5, 0.8, 1.0, 1.3, 1.5, 1.8, 2.0, 2.5 mm
- Air Inlet : M18x1.0P
- Fluid Inlet : 3/8" PS
- Gun Weight: 516g



JS K2P

- JS K2P  
2 Liter Pressure Tank



JS K2P + K600P

- JS K2P + K600P  
2 Liter Pressure Tank with K600P Pressure Paint Gun



JS-501S

- JS-501S  
Dry Blow Gun Stand For 2 Dry Guns  
1pc/6kgs/7kgs/0.52'



- JS-W71D  
Dishevelled Spray Gun

1. JS-K350  
Air Regulator With Gauge



1

2. JS-RK2  
Stainless Steel Viscosity Cup



2

3. JS-RK4  
Nylon Viscosity Cup



3

4. JS-BH02  
1/4" Fitting



4

5. JS-BH03  
3/8" Fitting



5

6. JS-NNK  
Nozzle And Needle Are Made Of  
Stainless Steel



6

7. JS-17CSET  
17pcs Cleaning Kit



7

8. JS-K85  
Air Regulator



8

9. Air Cap of Airless Gun



9

10. JS-PC6PF  
Gravity Nylon Filter



10

11. JS-PC27F  
9.5m/m Suction Filter



11

12. JS-PC29F  
11.5m/m Suction Filter



12

13. JS-PC29FN  
Suction Nylon Filter



13

14. JS-PC29FR  
Suction Stainless Steel Filter



14

15. JS-RDF  
Disposable Filter



15

16. JS-TWS  
Water Separator



16

17. JS-AJN  
Simple Air Regulator



17

18. JS-BH23100(10M)  
19. JS-BH231000(100M)  
20. JS-BH23130(130M)



18

Twin Hose 3/8" PU+Nylon Paint Hose  
Twin Hose 1/4" PU Air Hose  
Air Hose: ID 6.5m/m x OD10m/m  
Paint Hose: ID 8.0m/m x OD11m/m

21. JS-DP3+K600P  
Diaphragm Pump with Stand +  
K600P Pressure Paint Gun










21

■ JS-DP3

Diaphragm Pump :  
Pressure Ratio : 1 : 1  
Air Pressure : 1~5 kg/cm2  
Paint Outlet : 1/4" PT  
Air Inlet : 1/4"  
Max. Delivery : 16~23 L/ Min.  
•The castings are Aluminum.  
•The seats and balls are stainless steel.  
•The Max. air Inlet pressure into pump shuttle valve is not to exceed 70 PSI.  
•Diaphragm Material : Teflon  
•Acceptable Fluid Temperature : 10° ~ 80°

# Accessories

 <p>JS-DPC 6AM 600c.c Nylon Cup</p> <p>1</p>	 <p>JS-DPC 6A 600c.c Nylon Cup</p> <p>2</p>	 <p>JS-DPC 6PG 600 C.C. Gravity Cup</p> <p>3</p>
 <p>JS-1101 125c.c Nylon Cup</p> <p>4</p>	 <p>JS-1106 600c.c Aluminum Cup W/Alu. Lip</p> <p>5</p>	 <p>JS-G400SF 400 C.C Stainless Steel Gravity Cup with support</p> <p>6</p>
 <p>JS-G400S 400c.c Stainless Steel Gravity Cup</p> <p>7</p>	 <p>JS-1107 1000c.c Alu. Gravity Cup W/Nylon Lid</p> <p>8</p>	 <p>JS-PC1-2 Alu. 1000c.c Gravity Cup -1/4"</p> <p>JS-PC1-3 Alu. 1000c.c Gravity Cup -3/8"</p> <p>9</p>
 <p>JS-PC23 Alu. 700c.c Suction Cup -1/4"</p> <p>10</p>	 <p>JS-PC29 Alu. 1000c.c Suction Cup -3/8"</p> <p>11</p>	 <p>JS-PC650 Alu. 1000c.c Suction Cup -3/8"</p> <p>12</p>
 <p>JS-DPC 871F Suction Cup</p> <p>13</p>	 <p>K-1813S Undercoating gun (Short Nozzle)</p> <p>14</p>	 <p>K-1813L-150mm K-1813L-300mm K-1813L-600mm Undercoating gun (Long Nozzle)</p> <p>15</p>



**Air Brush Kit  
JS-AB-119**

Double-action trigger Air-Paint control, Precisely machined fine nozzle, suitable for art work, design painting.

- Contents:  
1-Air brush, 2-22C.C. 50C.C. Glass jar, 1-5' Air hose, 1-Adaptor, 1-Holder
- Specification:
 

Fluid nozzle :0.3mm	■ 40SETS/CTN/1.9'
Working pressure:15-30PSI	NW:18.3KGS
Cup capacity :22C.C. 50C.C.	GW:19.3KGS
Cup fix :detachable	



**Air Brush Kit  
JS-AB-116**

Double-action trigger Air-Paint control, special gun with fine round spray pattern, for art work, design & mural painting, fine regulation of material flow.

- Contents:  
1-Air brush, 2-10C.C. 5C.C. cup, 2-Adaptor, 1-wrench
- Specification:
 

Fluid nozzle :0.2mm	■ 40SETS/CTN/1.9'
Working pressure:15-30PSI	NW:17.9KGS
Air consumption :0.4-0.8CFM	GW:18.9KGS
Cup capacity :10C.C. 5C.C.	
Cup fix :Side screw fix	



**Air Brush Kit  
JS-AB-134B**

Double-action trigger Air-Paint control, Precisely machined fine nozzle, suitable for art work, design painting.

- Specification:
 

Fluid nozzle :0.3mm	■ 40SETS/CTN/1.9'
Working pressure :15-30PSI	NW:17.9KGS
Capacity of fixed cup:2C.C. 5C.C. 13C.C.	GW:18.9KGS



**SET Air Brush Kit  
JS-AB-133BM**

Double-action trigger Air-Paint control, Precisely machined fine nozzle, suitable for art work, design painting.

- Contents:  
1-Air brush, 2-10C.C. 5C.C. Glass cup, 2-Adaptor, 1-wrench
- Specification:
 

Fluid nozzle :0.3mm	■ 40SETS/CTN/1.9'
Working pressure :15-30PSI	NW:13.5KGS
Capacity of fixed cup:5C.C.	GW:14.5KGS
	■ 40SETS/CTN/1.3'
	NW:11.2KGS
	GW:12.2KGS



**JS-SPD-06**  
AIR HOSE SET  
6.5FT 1/8" -1/8"



**JS-SPD-05**  
AIR HOSE SET  
6.5FT 1/8" -1/4"



**Air Compressor  
JS-CP-201**

- |                   |                             |
|-------------------|-----------------------------|
| Electric motor    | :1/6hp 110/220v, 60/50Hz    |
| Air displacement: | 110V/60Hz 1.8CFM(50.4L/min) |
|                   | :220V/50Hz 1.5CFM(42L/min)  |
| Connection        | :1/8"                       |
| Max. pressure     | :60PSI(4.2kgs)              |
| Electric cable    | :1.5M                       |
| Weight            | :4.3kgs                     |
| RPM               | :110C/3400, 220V/2800       |
| AMP               | :110V/1.6A, 220v/0.8A       |
| 4PCS/CTN/1/4'     |                             |
| NW:               | 21. KGS                     |
| GW:               | 22.0KGS                     |

## 拋光機 / Random Orbital Sanders / Lijadoras roto-orbitales



無集塵/  
Non-vacuum/no vacío  
ROS-N505(5"/125mm)  
ROS-N506(6"/150mm)  
ROS-N255(5"/125mm)  
ROS-N256(6"/150mm)  
Packing:10PCS/11.5/12.5KGS/1.7'



無集塵/  
Non-vacuum/no vacío  
ROS-N855(5"/125mm)  
ROS-N856(6"/150mm)  
ROS-N825(5"/125mm)  
ROS-N826(6"/150mm)  
Packing:10PCS/11.5/12.5KGS/1.7'



中央集塵/  
Central Vacuum/Aspiración centralizada  
ROS-C505(5"/125mm)  
ROS-C506(6"/150mm)  
ROS-C255(5"/125mm)  
ROS-C256(6"/150mm)  
Packing:10PCS/11.5/12.5KGS/1.7'



中央集塵/  
Central Vacuum/Aspiración centralizada  
ROS-C855(5"/125mm)  
ROS-C856(6"/150mm)  
ROS-C825(5"/125mm)  
ROS-C826(6"/150mm)  
Packing:10PCS/11.5/12.5KGS/1.7'



自吸式/  
Self-Generated Vacuum/Auto vacío genero  
HOSE & BAG  
OB-46-2  
ROS-S505(5"/125mm)  
ROS-S506(6"/150mm)  
ROS-S255(5"/125mm)  
ROS-S256(6"/150mm)  
Packing:6PCS/9/10KGS/2'



自吸式/  
Self-Generated Vacuum/Auto vacío generado  
HOSE & BAG  
OB-46-2  
ROS-S855(5"/125mm)  
ROS-S856(6"/150mm)  
ROS-S825(5"/125mm)  
ROS-S826(6"/150mm)  
Packing:6PCS/9/10KGS/2'

Model NO.	耗氣量CFM Air Cons. Consumo de aire	管徑inch(mm) Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	震動值m/s <sup>2</sup> Vibration Vibración	噪音值dBA Noise Level Ruido	偏心直徑 Diameter Orbit Diámetro órbita	重量Lbs./kg Weight Peso	底盤尺寸inch Pad Dia. Plato
N505 ROS-C505 S505 N855 ROS-C855 S855	1.6	3/8(10)	1/4	11,000	0.8	80dBA	5.0	2(0.9)	5"(125)
N506 ROS-C506 S506 N856 ROS-C856 S856	1.6	3/8(10)	1/4	11,000	0.8	80dBA	5.0	2(0.9)	6"(150)
N255 ROS-C255 S255 N825 ROS-C825 S825	1.6	3/8(10)	1/4	11,000	0.8	80dBA	2.5	2(0.9)	5"(125)
N256 ROS-C256 S256 N826 ROS-C826 S826	1.6	3/8(10)	1/4	11,000	0.8	80dBA	2.5	2(0.9)	6"(150)



## 2 Hand Gear-Driven Sander



無集塵/  
Non-vacuum/no vacío  
**JS-14GH-N5(5~/125mm)**  
**JS-14GH-N6(6~/150mm)**  
Packing:6PCS/12/13KGS/2'



無集塵/  
Non-vacuum/no vacío  
**JS-14GH-N8(8~/200mm)**  
Packing:6PCS/12/13KGS/2'



中央集塵/  
Central Vacuum/Aspiración centralidaza  
**JS-14GH-C5(5~/125mm)**  
**JS-14GH-C6(6~/150mm)**  
Packing:6PCS/12/13KGS/2'



中央集塵/  
Central Vacuum/Aspiración centralidaza  
**JS-14GH-C8(8~/200mm)**  
Packing:6PCS/12/13KGS/2'



自吸式/  
Self-Generated Vacuum/Auto Vacío generado  
**JS-14GH-S5(5~/125mm)**  
**JS-14GH-S6(6~/150mm)**  
Packing:6PCS/12/13KGS/2'



自吸式/  
Self-Generated Vacuum/Auto Vacío generado  
**JS-14GH-S8(8~/200mm)**  
Packing:6PCS/12/13KGS/2'



## Jitterbug Sanders Pad size:75mm\*100mm for JS-SBO-813,100mm\*110mm for JS-SBO-814

HOSE & BAG  
OB-46-2



無集塵/  
Non-vacuum/no vacío  
**JS-SBO-813**  
Packing:10PCS/8.5/9.2KGS/1.2'



中央集塵/  
Central Vacuum/  
Aspiración centralidaza  
**JS-SBO-813C**  
Packing:10PCS/8.5/9.2KGS/1.2'



自吸式/  
Self-Generated Vacuum/  
Auto Vacío generado  
**JS-SBO-813S**  
Packing:6PCS/7.5/8.5KGS/1.8'



無集塵/  
Non-vacuum/no vacío  
**JS-SBO-813A(Clip type)**  
Packing:10PCS/8.8/9.8KGS/1.2'



無集塵/  
Non-vacuum/no vacío  
**JS-SBO-814**  
Packing:10PCS/8.8/9.8KGS/1.2'



無集塵/  
Non-vacuum/no vacío  
**JS-SBO-814A(Clip type)**  
Packing:10PCS/8.8/9.8KGS/1.2'

## Delta Sanders

HOSE & BAG  
OB-46-2



無集塵/  
Non-vacuum/no vacío  
**JS-SBO-815**  
Packing:10PCS/8.5/9.2KGS/1.2'  
Patent: US D494,434



中央集塵/  
Central Vacuum/  
Aspiración centralidaza  
**JS-SBO-815C**  
Packing:10PCS/8.5/9.2KGS/1.2'



自吸式/  
Self-Generated Vacuum/  
Auto Vacío generado  
**JS-SBO-815S**  
Packing:6PCS/7.5/8.5KGS/1.8'


Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	震動值m/s <sup>2</sup>	偏心直徑	重量lbs/kg	底盤尺寸inch
	Air Cons.	Hose Size	Air inlet	Free Speed	Vibration	Diameter Orbit	Weight	Pad Dia.
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Vibración	Diámetro órbita	Peso	Plato
JS-14GH N5/C5/S5	3.0	3/8(10)	1/4	900	<2.5	5.0	3.3(1.5)	5"(125)
JS-14GH N6/C6/S6	3.0	3/8(10)	1/4	900	<2.5	5.0	3.5(1.6)	6"(150)
JS-14GH N8/C8/S8	3.0	3/8(10)	1/4	900	<2.5	5.0	3.5(1.6)	8"(200)
JS-SBO 813/813C/ 813S/813A	1.6	3/8(10)	1/4	10,000	0.8	3.2	1.5(0.7)	/
JS-SBO 814/814A	1.6	3/8(10)	1/4	10,000	0.8	3.2	1.5(0.7)	/
JS-SBO 815/815C/ 815S	1.6	3/8(10)	1/4	10,000	0.8	3.2	1.5(0.7)	/

## Heavy Duty Jitterbug Sanders



Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	震動值m/s <sup>2</sup>	偏心直徑	重量Lbs./Kg	底盤尺寸inch
	Air Cons.	Hose Size	Air inlet	Free Speed	Vibration	Diameter Orbit	Weight	Pad Dia.
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Vibración	Diámetro órbita	Peso	Plato
<b>JS-SBO NL4C/NL4AC CL4C/SL4C</b>	1.6	3/8(10)	1/4	8,500	0.8	3.2	2.6(1.2)	/
<b>JS-HS NL4C/NL4AC CL4C/SL4C</b>	3.0	3/8(10)	1/4	7,500	0.8	5.0	3.3(1.5)	/

## 底盤 / Pad Dia. / Plato

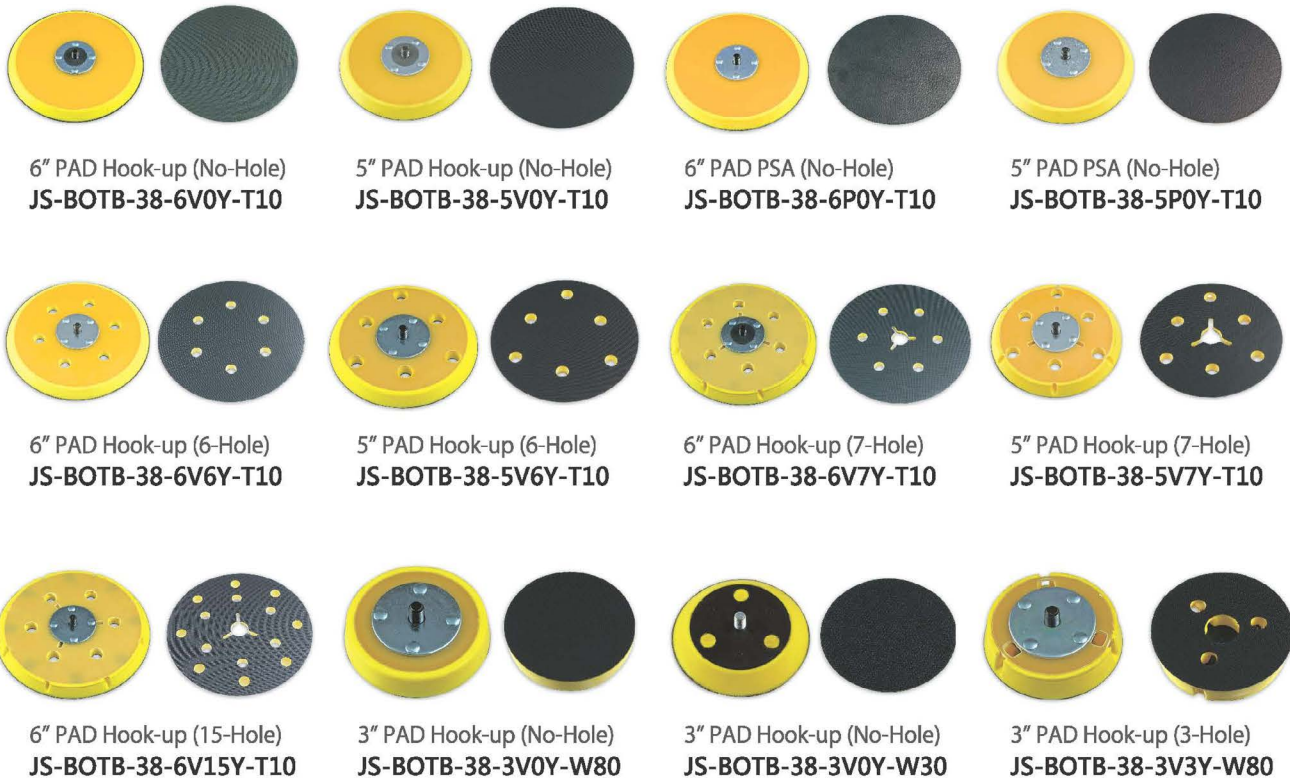

## 氣鑽 (可逆轉式) / Air Drill ( Reversible) / Taladro (reversible)



3/8" Air Reversible Drill  
**JS-TS-1312**  
**JS-TS-1312D**(Featuring Control)  
Packing:10PCS/10.2/10.8KGS/0.78'



3/8" Air Reversible Drill  
**JS-TS-1312P**  
**JS-TS-1312DP**(Featuring Control)  
Packing:10PCS/11.4/12KGS/0.78'



1/2" Air Reversible Drill  
**JS-TS-1412**  
**JS-TS-1412D**(Featuring Control)  
Packing:10PCS/14.6/15.6KGS/0.96'  
**JS-TS-1612**  
**JS-TS-1612D**(Featuring Control)  
Packing:10PCS/14.5/15.5KGS/0.96'



1/2" Air Reversible Drill  
**JS-TS-1412P**  
**JS-TS-1412DP**(Featuring Control)  
Packing:10PCS/14.6/15.6KGS/0.96'  
**JS-TS-1612P**  
**JS-TS-1612DP**(Featuring Control)  
Packing:10PCS/15.5/16.5KGS/0.96'

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	夾頭尺寸inch(mm)	螺紋軸inch	重量Lbs./Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Chuck Size	Spindle Thread	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Interior Manquera aire	Rosca del eje	Peso	Longitud total
JS-TS 1312/1312P/ 1312D/1312DP	4	3/8(10)	1/4	1,800	3/8(10)	3/8"-24	2.0(0.9)	7.6(195)
JS-TS 1412/1412P/ 1412D/1412DP	4	3/8(10)	1/4	450	1/2(13)	3/8"-24	2.6(1.2)	9.0(230)
JS-TS 1612/1612P/ 1612D/1612DP	4	3/8(10)	1/4	700	1/2(13)	3/8"-24	2.6(1.2)	9.0(230)

## 氣動剪 / Air Shear / La Cizalla Air Metal Shears/Nibbler



Air Metal Shears  
**JS-TS-1003**  
Packing:12PCS/15/16KGS/1.1'



Shear Head  
70240



Pistol-Grip Air Shear  
**JS-TS-1023**  
Packing:12PCS/15/16KGS/1'




Air Nibbler  
**JS-TS-1053**  
Packing:12PCS/13/14KGS/0.8'

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	尺寸/Cutting Capacity/Capacidad		重量Lbs./Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	鋼	鋁	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Steel/Acero	Aluminum/Aluminio	Peso	Longitud total
JS-TS-1003	3.7	3/8(10)	1/4	2,600	1.2mm	1.6mm	2.2(1)	10(255)
JS-TS-1023	3.7	3/8(10)	1/4	2,600	1.2mm	1.6mm	2.2(1)	7.8(200)
JS-TS-1053	3.7	3/8(10)	1/4	2,600	1.2mm	1.6mm	2.2(1)	7.2(185)

## 迷你氣動研磨機 / Mini Die Grinder / Amoladoras Pequeñas

**0.3HP**

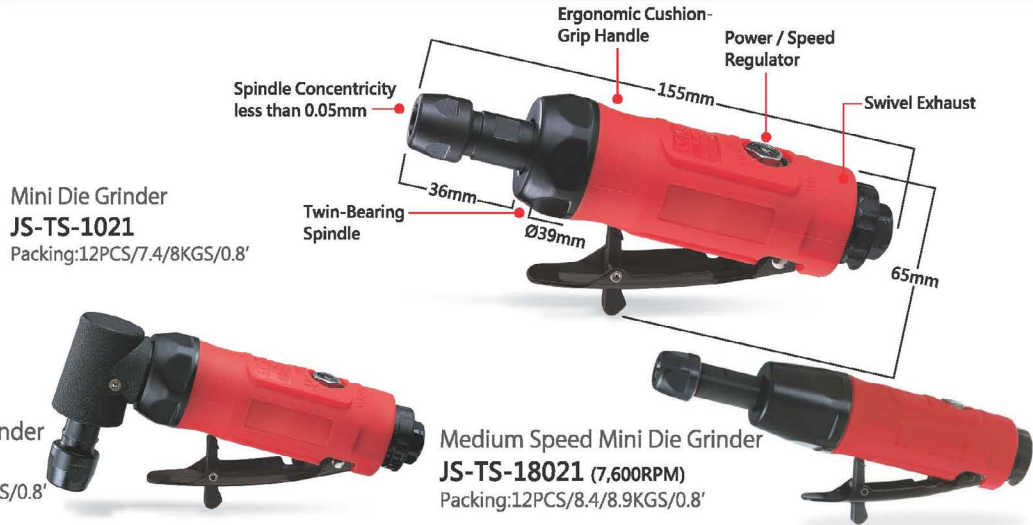

Mini Die Grinder  
**JS-TS-1021**  
Packing:12PCS/7.4/8KGS/0.8'

Mini Air Angle Die Grinder  
**JS-TS-1521**  
Packing:12PCS/8.6/9.2KGS/0.8'

Medium Speed Mini Die Grinder  
**JS-TS-18021 (7,600RPM)**  
Packing:12PCS/8.4/8.9KGS/0.8'

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	夾頭尺寸inch(mm)	重量Lbs./Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Collect Size	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Pinza	Peso	Longitud total
JS-TS-1021	2.6	3/8(10)	1/4	25,000	1/4(6)	0.9(0.4)	6.1(155)
JS-TS-1521	2.6	3/8(10)	1/4	20,000	1/4(6)	1.1(0.5)	6.1(155)
JS-TS-18021	2.6	3/8(10)	1/4	7,600	1/4(6)	1.3(0.6)	7.3(185)

**0.5HP**



Air Die Grinder  
**JS-TS-1002**  
Packing:12PCS/9/9.8KGS/0.8'

Low Speed Air Die Grinder  
**JS-TS-1542A(2,600PRM)**  
**JS-TS-1562A(3,600PRM)**  
Packing:12PCS/11.5/12.1KGS/1.1'

**JS-TS-1002AL**  
Packing:12PCS/12/13KGS/1.1'

5" Air Extension Die Grinder  
**JS-TS-1002L**  
Packing:12PCS/12/13KGS/1.1'

Air Angle Grinder  
**JS-TS-1012**  
Packing:12PCS/11/12KGS/0.8'

115° Air Angle Die Grinder  
**JS-TS-15112**  
Packing:12PCS/10.8/11.8KGS/0.8'

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	夾頭尺寸inch(mm)	重量Lbs./Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Collect Size	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Pinza	Peso	Longitud total
JS-TS-1002	3.5	3/8(10)	1/4	22,000	1/4(6)	1.3(0.6)	7.0(180)
JS-TS-1542A/1562A	3.5	3/8(10)	1/4	2,600/3,600	1/4(6)	1.5(0.7)	8.2(210)
JS-TS-1002AL	3.5	3/8(10)	1/4	22,000	1/4(6)	1.5(0.7)	9.6(245)
JS-TS-1002L	3.5	3/8(10)	1/4	22,000	1/4(6)	1.8(0.8)	11.2(285)
JS-TS-1012/15112	3.5	3/8(10)	1/4	18,000	1/4(6)	1.5(0.7)	7.0(180)

**0.5HP氣動研磨機 / 氣動切割機 / 氣動去膠輪機**  
**0.5HP Angle Grinders / Cutters / Air Erasers / Air Tire Buffers**  
**0.5HP Amoladoras Angular / Cortador / Barrador / Buffer**



**2" Air Angle Grinder**  
**JS-TS-1032**  
 Packing:12PCS/11.5/12.4KGS/1.5'



2" Disc Wheel  
**BT288544-2GD060(#60Grit)**  
 2"x 1/6"x 3/8"



**Air Cutter**  
**JS-TS-1052**  
 Packing:12PCS/12/13KGS/1.5'



3" Disc Wheel  
**BT25134-3GD** 3"x3/8"x1/16"



**Air Tire Buffer**  
**JS-TS-1072(2,600PRM)**  
**JS-TS-13072(3,600PRM)**  
 Packing:12PCS/11.6/12.6KGS/1.1'



Tire Buffer Metal Wheel  
**BT265A6026TB** 2-1/18"x1-1/5"



**0.75HP 4" Air Tire Buffer**  
**JS-TS-1992(22,000PRM)**  
 Packing:12PCS/11.6/12.6KGS/1.1'



**Air Eraser**  
**JS-TS-1062(2,600PRM)**  
**JS-TS-13062(3,600PRM)**  
 Packing:12PCS/12/13KGS/1.1'



Rubber Eraser  
**26036** 3-8/15"x7/12"



Rubber Eraser  
**26036-2** 3-8/15"x7/12"



Rubber Eraser  
**26036-7** 4"x7/12"



**Air Tire Buffer**  
**JS-TS-1272(2,600PRM)**  
 Packing:12PCS/12/13KGS/1.1'



Tire Buffer Metal Wheel  
**BT265A6026TB** 2-1/18"x1-1/5"

Adapter  
**26041-1** 3/8"-24UNF X 5/16"-24UNF

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	磨盤inch	重量Lbs/Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Grinding Wheel	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Disco	Peso	Longitud total
<b>JS-TS-1032</b>	3.5	3/8(10)	1/4	15,000	2"	1.5(0.7)	7.0(180)
<b>JS-TS-1072/13072</b>	3.5	3/8(10)	1/4	2,600/3,600	Spindle Thread 3/8"-24	1.8(0.8)	9.0(230)
<b>JS-TS-1992</b>	4.1	3/8(10)	1/4	22,000	Spindle Thread 3/8"-24	1.8(0.8)	8.0(205)
<b>JS-TS-1052</b>	3.5	3/8(10)	1/4	21,000	Cutting Wheel 3"	1.8(0.8)	7.6(195)
<b>JS-TS-1062/13062</b>	3.5	3/8(10)	1/4	2,600/3,600	Spindle Thread 5/16"-24	1.8(0.8)	8.7(220)
<b>JS-TS-1272</b>	3.5	3/8(10)	1/4	2,600	Spindle Thread 5/16"-24	1.8(0.8)	9.2(235)

## 0.5HP氣鑽 / 棘輪扳手/ 氣動彎角研磨機

0.5HP Air Drills / Ratchet Wrenches/ Angle Die Grinders

0.5HP Taladro / Llave de impacto de aire / Amoladoras



3/8" 90° Angle Die Grinder

**JS-TS-1522**

Packing:12PCS/14.8/15.4KGS/0.8'



Low Speed Air Angle Die Grinder

**JS-TS-1422**

Packing:12PCS/14.8/15.4KGS/0.8'



3/8" Air Drill

**JS-TS-1542 (2,600RPM)**

**JS-TS-1562 (3,600RPM)**

Packing:12PCS/11.5/12.1KGS/1.1'



3/8" Air Ratchet Wrench

**JS-TS-1007**

1/2" Air Ratchet Wrench

**JS-TS-1507**

Packing:12PCS/15/16KGS/1.1'



Abrasive Finishing Tool

**JS-TS-1562B**

Packing:12PCS/11.5/12.0KGS/1.1'



3/8" Air Drill

**JS-TS-1542P (2,600RPM)**

**JS-TS-1562P (3,600RPM)**

Packing:12PCS/13/14KGS/1.1'

Model NO.	耗氣量CFM	管徑inch	入氣口inch	轉速RPM	夾頭inch(mm)	螺紋軸mm	重量Lbs/Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Chuck Size	Spindle	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Interior Manquera aire	Rosca del eje	Peso	Longitud total
JS-TS-1522	3.5	3/8(10)	1/4	1,800	3/8(10)	3/8" -24	2.0(0.9)	8.0(250)
JS-TS-1422	3.5	3/8(10)	1/4	1,800	Collet Size in(mm) 1/4(6)	3/8" -24	2.0(0.9)	8.0(205)
JS-TS-1542/1542P	3.5	3/8(10)	1/4	2,600	3/8(10)	3/8" -24	1.8(0.8)	8.4(215)
JS-TS-1562/1562P	3.5	3/8(10)	1/4	3,600	3/8(10)	3/8" -24	1.8(0.8)	8.2(210)
JS-TS-1007/1507	3.5	3/8(10)	1/4	175	Square Drive 3/8" ,1/2"	Torque(ft-lbs/kg-m) 50/6.9	1.8(0.8)	10.4(265)
JS-TS-1562B	3.5	3/8(10)	1/4	3,600	/	M10*1.5	1.8(0.8)	9.2(235)


## 拋光機 / Air Sander / Lijadoras



Air Sander

**JS-TS-1005**

Packing:12PCS/19.3/20.3KGS/2'

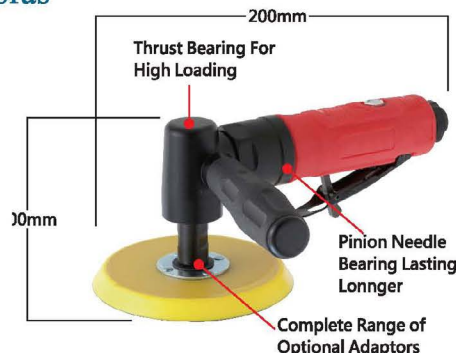

Spot Repair Sander

**JS-1131-ST**

Packing:12PCS/7.8/8.4KGS/0.8'

偏心直徑:2.0

Multi-Function  
Angle Sander/Polisher

**JS-TS-1772(4,000PRM)**

Packing:10PCS/11.2/12.8KGS/0.96'

Model NO.	耗氣量CFM	管徑inch	入氣口inch	轉速RPM	底盤inch	螺紋軸mm	重量Lbs/Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Disk	Spindle	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Disco	Rosca del eje	Peso	Longitud total
JS-TS-1005	3.5	3/8(10)	1/4	10,000	4", 5"	3/8" -24	3.1(1.4)	8.2(210)
JS-TS-1772	3.5	3/8(10)	1/4	4,000	3", 5"	5/16" -24	2.2(1.0)	7.8(200)
JS-1131-ST	2.6	3/8(10)	1/4	13,000	/	/	1.1(0.5)	/

## 拋光機 / Rust & Paint removal tools / Lijadoras multifunciones

HOSE & BAG  
OB-46-2



無集塵/  
Non-vacuum/no vacío

**JS-TS-1082**

Packing:10PCS/21.5/22.5KGS/1.74'



中央集塵/  
Central Vacuum/Aspiración centralizada

**JS-TS-1082C**

Packing:4PCS/8/9KGS/2.1'



自吸式/  
Self-Generated Vacuum/Auto Vacío generado

**JS-TS-1082S**

Packing:4PCS/9/10KGS/2.1'

Model NO.	耗氣量CFM	管徑inch(mm)	入氣口inch	轉速RPM	螺紋軸mm	重量Lbs/Kg	總長度inch(mm)
	Air Cons.	Hose Size	Air inlet	Free Speed	Spindle	Weight	Length
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Rosca del eje	Peso	Longitud total
<b>JS-TS-1082/1082C/1082S</b>	3.5	3/8(10)	1/4	4,000	9	2.7(1.2)	11.8(300)

無集塵/  
Non-vacuum/no vacío

**JS-TS-1082K**

Packing:4PCS/13.8/14.8KGS/3'

Specifications:

- 1PC Paint Removal Tool
- 1PC Rubber Eraser Wheel
- 1PC Stripping Wheel
- 1PC Hub
- 3PCS Wire Wheel
- 1PC Nipple
- 1PC Hex
- 1PC Screw
- 1PC Blow Molded Cast



中央集塵/  
Central Vacuum/Aspiración centralizada

**JS-TS-1082CK**

Packing:4PCS/13/14.8KGS/3'

Specifications:

- 1PC Paint Removal Tool
- 1PC Rubber Eraser Wheel
- 1PC Stripping Wheel
- 1PC Hub
- 3PCS Wire Wheel
- 1PC Nipple
- 1PC Hex
- 1PC Screw
- 1PC Blow Molded Cast



## 棘輪扳手 / Air Ratchet wrench Llave de impacto de aire



3/8"(9.5mm)  
Handle Exhaust / Exclusion del aire por el mango

**JS-1201YR**

Packing:20PCS/10/11KGS/0.4'



Dust-free Protection Cap  
Tapa de protección

Model NO.	耗氣量CFM	管徑inch	入氣口inch	轉速RPM	四角傳動inch	螺栓inch	重量Kg/LB	長度inch(mm)	最大扭矩ft-lbs/Nm	使用壓力PSI
	Air Cons.	Hose Size	Air inlet	Free Speed	Square drive	Bolt Capacity	Weight	Length	Max. torque	Air pressure
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Unidad de la plaza	Tornillo	Peso	Longitud	Par Máxima	Presion de funcionamiento
<b>JS-1201YR</b>	15	1/2	1/4	200	3/8	3/8	0.5/1.1	6 1/2"(165)	25/34	90
<b>JS-1201AYR</b>	15	1/2	1/4	200	1/4	5/16	0.5/1.1	6 1/2"(165)	25/34	90

## 氣動研磨機 / Air Die Grinder / Amoladoras

※Rear Exhaust / 後排氣 / Evacuación posterior del aire



**JS-4401**  
Packing:20pcs/0.5cuft/G.W.:11kgs



**JS-4402**  
Packing:20pcs/0.5cuft/G.W.:11kgs



無齒輪/Sin Engranaje  
**JS-4501**  
Packing:20pcs/1.1cuft/G.W.:12kgs



Model NO.	耗氣量m <sup>3</sup> /min	管徑mm	入氣口inch	轉速RPM	震動值m/s <sup>2</sup>	夾頭尺寸inch(mm)	重量Kgs	長度mm	噪音dBa
	Air Cons.	Hose Size	Air inlet	Free Speed	Vibration	Collect Size	Weight	Length	Sound Pressure
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Vibración	Pinza	Peso	Longitud	Ruido
JS-4401	0.42	5	1/4	22,000	<2.5	1/4(6)	0.40	150	73
JS-4402	0.42	5	1/4	20,000	<2.5	1/4(6)	0.40	150	80
JS-4501	0.49	5	1/4	22,000	<2.5	1/4(6)	0.55	170	80



無齒輪/Sin Engranaje  
旋轉式/Rotary/Giratorio  
**JS-4502**  
Packing:10pcs/1.0cuft/G.W.:9kgs



無齒輪/Sin Engranaje  
旋轉式/Rotary/Giratorio  
**JS-4503**  
Packing:20pcs/1.1cuft/G.W.:12kgs



**AIR GRINDER KIT JS-4601K2**  
-AIR GRINDER X 1PC  
-2" PAD X1 PC  
-3" PAD X1 PC  
-2" Cleaning Strip Disc. X 1PC  
-3" Cleaning Strip Disc. X 1PC  
-2" Sanding Disc. X 5 PC  
-3" Sanding Disc. X 5 PC  
-WENCH X 1PC  
-OIL POT X 1PC  
-Nipple x 1 pc  
- Blow Case x 1 pc



無齒輪/Sin Engranaje  
旋轉式/Rotary/Giratorio  
**JS-4601**  
Packing:20pcs/1.1cuft/G.W.:15kgs



無齒輪/Sin Engranaje  
偏擺/Dual Action/Roto-orbital  
**JS-4602**  
Packing:20pcs/1.1cuft/G.W.:14kgs



無齒輪/Sin Engranaje  
旋轉式/Rotary/Giratorio  
**JS-4603**  
Packing:20pcs/1.6cuft/G.W.:25kgs

Model NO.	耗氣量m <sup>3</sup> /min	管徑mm	入氣口inch	轉速RPM	震動值m/s <sup>2</sup>	偏心直徑mm	底盤尺寸inch	重量Kgs	長度mm	噪音dBa
	Air Cons.	Hose Size	Air inlet	Free Speed	Vibration	Diameter Orbit	Wheel Size	Weight	Length	Sound Pressure
	Consumo de aire	Tabaño de la manquera	La rosca de aire	Velocidad	Vibración	Diámetro órbita	Plato	Peso	Longitud	Ruido
JS-4502	0.53	5.0	1/4	22,000	<2.5	/	2	0.55	170	79
JS-4503	0.35	6.5	1/4	22,000	<2.5	/	2	0.51	177	75
JS-4601	0.49	6.0	1/4	15,000	<2.5	/	3	0.70	180	78
JS-4602	0.42	6.0	1/4	15,000	<2.5	3	2	0.65	180	77
JS-4603	0.48	6.5	1/4	3,000	<2.5	/	3-5	0.88	178	70



## 氣動衝擊扳手 /

Air impact wrench / Llave de impacto de aire \_\_\_\_\_



### 1/2" Micro Mini Light Weight

Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1602-FY 450FT/LB 400FT/LB  
Packing:10PCS/0.9cuft/G.W.:16KGS



### 1/2" Micro Mini Light Weight

Jumbo Hammer/Jumbo Maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1702-FY 500FT/LB 450FT/LB  
Packing:10PCS/0.9cuft/G.W.:16KGS



### 3/8" Micro Mini Light Weight

Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1802-FY 500FT/LB 450FT/LB  
Packing:10PCS/0.9cuft/G.W.:16KGS



Mini Size , High Torque

Pequeño, torque alto

體積小,高扭力

Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	重量Kg/LB Weight Peso	長度mm Length Longitud	四角傳動inch Square drive Unidad de la plaza	螺栓mm Bolt Capacity Tornillo	最大扭力ft.lb Max. torque Par Maxima	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presion de funcionamiento
JS-1602-FY	0.2	10	1/4	11,000	1.37/3.00	103	1/2	16	450/610	3.1	90
JS-1702-FY	0.2	10	1/4	11,000	1.36/3.00	99	1/2	16	500/678	2.8	90
JS-1802-FY	0.2	10	1/4	11,000	1.42/3.12	108	1/2	16	500/678	3.1	90

## 氣鑽 / Air Drill / Taladro del aire \_\_\_\_\_



JS-4011-KHT



JS-4021-KHT



JS-4101-KHT



JS-7011-KHT

Model NO.	管徑inch Hose Size Tabaño de la manquera	轉速RPM Free Speed Velocidad	螺紋軸 Spindle Rosca del eje	重量Lbs./Kgs Weight Peso	總長度inch/mm Length Longitud total	使用壓力PSI Air pressure Presion de funcionamiento
JS-4011-KHT	3/8	2,100	3/8" Air Drill	2.38/1.08	7.64(194)	90
JS-4021-KHT	3/8	450	1/2" Air Drill	3.25/1.48	9.41(239)	90
JS-4101-KHT	3/8	1,320	3/8" Air ANG. Drill	2.53/1.15	8.20(208)	90
JS-7011-KHT	3/8	2,500	3/8" Air Drill	1.98/0.90	8.25(210)	90

## 氣動衝擊扳手 / Air impact wrench / Llave de impacto de aire

**1/2"**  
Twin Hammer/Doble maza  
Front Exhaust

**JS-1103-FY 450FT/LB**  
Packing:6PCS/0.7cuft/G.W.:17.8KGS



**1/2"**  
Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

**JS-1203S-FY 450FT/LB**  
Packing:6PCS/0.7cuft/G.W.:17.8KGS



Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	重量Kg/LB Weight Peso	長度mm Length Longitud	四角傳動inch Square drive Unidad de la plaza	螺栓mm Bolt Capacity Tornillo	最大扭力ftlb Max. torque Par Maxima	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presión de funcionamiento
JS-1103-FY	0.22	10	1/4	8,000	2.6/5.7	185	1/2	18	450/610	4.6	90
JS-1203S-FY	0.20	10	1/4	7,000	2.6/5.7	185	1/2	18	450/610	4.5	90

**1/2" Mini Light Weight**  
Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

**JS-1202T4-FY 400FT/LB**  
Packing:10PCS/0.7cuft/G.W.:17KGS



**1/2" Heavy Duty**  
Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

**JS-1164-FY 800FT/LB**  
Packing:6PCS/0.7cuft/G.W.:17KGS



**3/4" Heavy Duty**  
Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

**JS-1264-FY 850FT/LB**  
Packing:6PCS/0.7cuft/G.W.:17KGS



**3/4" Heavy Duty**  
Twin Hammer/Doble maza  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

**JS-1106-FY 1100FT/LB**  
Packing:4PCS/0.85cuft/G.W.:18.6KGS



**1"**  
**JS-1206-FY**  
Packing:4PCS/0.85cuft/G.W.:19KGS



Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	重量Kg/LB Weight Peso	長度mm Length Longitud	四角傳動inch Square drive Unidad de la plaza	螺栓mm Bolt Capacity Tornillo	最大扭力ftlb Max. torque Par Maxima	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presión de funcionamiento
JS-1202T4-FY	0.20	10	1/4	11,000	1.50/3.30	142	1/2	16	400/542	3.1	90
JS-1164-FY	0.23	10	1/4	7,500	2.48/5.46	164	1/2	27	800/1085	4.5	90
JS-1264-FY	0.23	10	1/4	7,500	2.55/5.61	170	3/4	29	850/1152	4.5	90
JS-1106-FY	0.30	10	1/4	6,000	4.15/9.13	207	3/4	36	1100/1491	5.3	90
JS-1260-FY	0.30	10	1/4	6,000	4.25/9.35	215	1	38	1200/1627	5.3	90

### 1/2" Light Weight

Twin Hammer/Doble maza

把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1364-FY 1000FT/LB

Packing:6PCS/0.7cuft/G.W.:18KGS



### 3/4" Light Weight

Twin Hammer/Doble maza

把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1464-FY 1100FT/LB

Packing:6PCS/0.7cuft/G.W.:18KGS



Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	重量Kg/LB Weight Peso	總長度mm Length Longitud total	四角傳動inch Square drive Unidad de la plaza	螺栓mm Bolt Capacity Tornillo	最大扭力ft.lb Max. torque Par Maxima	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presion de funcionamiento
JS-1364-FY	0.23	10	1/4	7,200	2.60/5.7	171	1/2	29	1000/1356	4.5	90
JS-1464-FY	0.23	10	1/4	7,200	2.64/5.8	177	3/4	32	1100/1491	4.5	90

### 3/4" Heavy Duty

Twin Hammer/Doble maza

把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1306-FY 1400FT/LB

Packing:4PCS/0.85cuft/G.W.:23KGS



### 1" Heavy Duty

Twin Hammer/Doble maza

把手排氣 Handle Exhaust  
Exclusion del aire por el mango

JS-1308-FY 1500FT/LB

Packing:4PCS/0.85cuft/G.W.:23KGS



Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	轉速RPM Free Speed Velocidad	重量Kg/LB Weight Peso	長度mm Length Longitud	四角傳動inch Square drive Unidad de la plaza	螺栓mm Bolt Capacity Tornillo	最大扭力ft.lb Max. torque Par Maxima	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presion de funcionamiento
JS-1306-FY	0.32	10	3/8	4,500	5.0/11.00	215	3/4	38	1400/1898	6.1	90
JS-1308-FY	0.32	10	3/8	4,500	5.1/11.22	222	1	38	1500/2033	6.1	90

## 氣鎚 / Air Hammer / Martillo Neumático



JS-1401-FY-190

Packing:10PCS/1cuft/G.W.:22KGS

JS-1401-FY-250

Packing:10PCS/1cuft/G.W.:25KGS

JS-1501-FY-190

Packing:10PCS/1cuft/G.W.:22.2KGS

JS-1501-FY-250

Packing:10PCS/1cuft/G.W.:25KGS

JS-CF-801

Packing:10pcs/0.5cuft/  
G.W.:10kg

Model NO.	耗氣量m <sup>3</sup> /min Air Cons. Consumo de aire	管徑mm Hose Size Tabaño de la manquera	入氣口inch Air inlet La rosca de aire	重量Kg Weight Peso	長度mm Length Longitud	活塞行程mm Piston Stroke Carrera del piston	行程速度bpm Stroke Speed Velocidad de Impacto	震動值m/s <sup>2</sup> Vibration Vibración	使用壓力PSI Air pressure Presion de funcionamiento
JS-1401-FY-190	0.11	6.5	1/4	1.60	175	67	3,200	13.7	99
JS-1401-FY-250	0.11	6.5	1/4	2.00	225	89	2,100	11.0	96
JS-1501-FY-190	0.11	6.5	1/4	1.60	175	67	3,200	13.5	99
JS-1501-FY-250	0.11	6.5	1/4	1.93	225	89	2,100	11.0	96
CF-801		15.8	1/4	0.85	134	43	4,600		

## 氣動衝擊扳手 / Air impact wrench / Llave de impacto de aire



**Twin Hammer/Doble maza**  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

塑鋼氣動衝擊扳手  
Composite impact wrench  
Llave de impacto reversible en composite  
**JS-4601**

Packing:10PCS/CTN N.W.:14.3KG G.W.:15.3 KG CUFT:0.9'



**Twin Hammer**  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

迷你塑鋼氣動衝擊扳手  
Mini Composite impact wrench  
Llave de impacto reversible en composite  
**JS-9701**

Packing:10PCS/CTN N.W.:14.7KG G.W.:15.7 KG CUFT:0.9'



**Twin Hammer/Doble maza**  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

塑鋼氣動衝擊扳手  
Composite impact wrench  
Llave de impacto reversible en composite  
**JS-5101**

Packing:10PCS/CTN N.W.:23.5KG G.W.:24.5KG CUFT:1.6'



**Twin Hammer/Doble maza**  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

塑鋼氣動衝擊扳手  
Composite impact wrench  
Llave de impacto reversible en composite  
**JS-7701**

Packing:6PCS/CTN N.W.:23.3KG G.W.:24.3 KG CUFT:1.3'



**Twin Hammer/Doble maza**  
把手排氣 Handle Exhaust  
Exclusion del aire por el mango

迷你塑鋼氣動衝擊扳手  
Mini Composite impact wrench  
Llave de impacto reversible en composite  
**JS-8701**

Packing:6PCS/CTN N.W.:23.9KG G.W.:24.9 KG CUFT:1.3'



**Twin Hammer/Doble maza**  
Side Exhaust

氣動衝擊扳手  
Air impact wrench-Extended 6"  
Llave de impacto  
**JS-8301**



inner trigger

Model NO.	耗氣量cfm Air Cons. Consumo de aire	入氣口inch Air inlet La rosca de aire	空轉轉速RPM Free Speed La Velocidad	重量Kg/LB Weight Peso	總長度mm Length Longitud total	四角傳動inch Square drive Unidad de la plaza	工作扭力ft.lb Working torque Par funcional	最大扭力ft.lb Max. torque Par Maxima	使用壓力PSI Air pressure Presion de funcionamiento
JS-4601	4.2	1/4	8,000	1.3/2.8	160	3/8	400ft-lb 542Nm/5s	450ft-lb 610Nm/15s	90
JS-9701	4.2	1/4	11,000	1.3/2.8	160	1/2	450ft-lb 610Nm/5s	550ft-lb 745Nm/15s	90
JS-5101	4.6	1/4	8,500	2.1/4.6	190	1/2	650ft-lb 881Nm/5s	820ft-lb 1,111Nm/15s	90
JS-7701	7.0	3/8	5,500	3.7/8.1	220	3/4	1,200ft-lb 1,627Nm/5s	1,500ft-lb 2,033Nm/15s	90
JS-8701	7.0	3/8	5,500	3.8/8.3	230	1	1,200ft-lb 1,627Nm/5s	1,500ft-lb 2,033Nm/15s	90
JS-8301	11.0	1/2	3,600	11.7/25.8	550	1	1,800ft-lb 2,440Nm/5s	2,200ft-lb 2,982Nm/15s	90

## Air impact wrench

### 3/4" Twin Hammer

#### Composite impact wrench

- Handle exhaust
- Silent muffler device.
- Three-steps forward/Two-steps reverse regulator

**YG-KZ-508T**

Packing(pcs/N.W./G.W./cuft):4/16.12kgs/16.62kgs/1.3'



### 1/2" Twin Hammer

#### Composite impact wrench

- Forward:3 speed
- Reverse:3 speed

**YG-KZ-507ZN**

Min.Hose size:3/8" I.D.

Packing(pcs/N.W./G.W./cuft):10/21kgs/22kgs/1.5'



### Twin Hammer Series



### 1/2" Heavy Duty

- Front exhaust
- Forward:5 speed
- Reverse:1 speed

**YG-KZ-507**

Packing(pcs/N.W./G.W./cuft):  
10/26kgs/27kgs/1.5'



### 1" Heavy Duty

- Forward:2 speed
- Reverse:2 speed

**YG-KZ-517E**

Packing(pcs/N.W./G.W./cuft):  
2/24kgs/26kgs/1.6'



### Rocking Dog Series



### 3/8" Single Hammer

**YG-KZ-501**

Packing(pcs/N.W./G.W./cuft):  
20/18kgs/19kgs/0.65'



### 1/2"

**YG-KZ-504**

Packing(pcs/N.W./G.W./cuft):  
20/22kgs/23kgs/1.5'

Model NO.	Square drive	Capacity Bolt Size	Free Speed (RPM)	Max.Torque (ft-lbs/Nm)	Sound Level dB(A)	Air pressure (PSI)	Air Inlet (PT,NPT)	Avg.Air Cons. (CFM)	Over Length (mm)	Product Weight (kgs/Lbs)	Vibration (m/s <sup>2</sup> )
YG-KZ-508T	3/4"	1"(25.4mm)	5,000	1,400/1,898	85	90	3/8"	12	240	3.6/7.9	
YG-KZ-507ZN	1/2"	5/8"(16mm)	8,000	750/1,017	90	90	1/4"	4.5	195	1.9/4.2	
YG-KZ-507	1/2"	1"(25.4mm)	8,000	420/-	96	90	1/4"	4.5			9
YG-KZ-517E	1"	1-3/4"(45mm)	3,000	1,800-2,200/-	95	90	1/2"	14			6.9
YG-KZ-501	3/8"	7/16"(11mm)	8,000	75/-	91	90	1/4"	3			7.1
YG-KZ-504	1/2"	5/8"(16mm)	7,000	260/-	94	90	1/4"	4.5			10.4

## Air Hammer



### 150mm

**YG-KZ-101**

Packing(pcs/N.W./G.W./cuft):  
10/16kgs/17kgs/0.61'



### 190mm

**YG-KZ-106**

Packing(pcs/N.W./G.W./cuft):  
10/17kgs/18kgs/0.67'



### 250mm Heavy Duty

**YG-KZ-112**

Packing(pcs/N.W./G.W./cuft):  
10/22.5kgs/25kgs/1.0'

Model NO.	Chisel Shank (in)	Bore Diameter(ID)	Stroke Length	Blow per Min (BPM)	Sound Level dB(A)	Vibration (m/s <sup>2</sup> )	Air pressure (PSI)	Air Inlet (PT,NPT)	Avg.Air Cons. (CFM)
YG-KZ-101	0.401	3/4"(19.05mm)	1-5/8"(41mm)	4,500	101	19.3	90	1/4"	5
YG-KZ-106	0.401	3/4"(19.05mm)	2-5/8"(66mm)	3,000	99	4	90	1/4"	5.5
YG-KZ-112	0.401	3/4"(19.05mm)	3-5/8"(92mm)	2,200	101	7	90	1/4"	6

## Air Ratchet

**3/8"**  
YG-KZ-5201  
**1/2"**  
YG-KZ-5202  
Packing(pcs/N.W./cuft):20/23kgs/24kgs/0.7'



**3/8" 1/2"**  
Plantary Gear Design

**3/8" Heavy Duty**  
YG-KZ-5203  
**1/2" Heavy Duty**  
YG-KZ-5204  
Packing(pcs/N.W./G.W./cuft):20/23kgs/24kgs/0.7'



**3/8" 1/2"**  
Full Cage Gear Design

**3/8" Heavy Duty**  
YG-KZ-5205  
**1/4" Heavy Duty**  
YG-KZ-5206  
Packing(pcs/N.W./cuft):20/11kgs/12kgs/0.48'



**PRO**

**3/8" Mini Stubby Ratchet**  
YG-KZ-5207  
**1/4" Mini Stubby Ratchet**  
YG-KZ-5208  
Packing(pcs/N.W./G.W./cuft):25/12.5kgs/13kgs/0.5'



**PRO**

Model NO.	Square drive	Free Speed (RPM)	Max.Torque (ft-lb)	Sound Level dB(A)	Vibration (m/s <sup>2</sup> )	Air pressure (PSI)	Air Inlet (PT,NPT)	Avg.Air Cons. (CFM)	Over Lenth (mm)
YG-KZ-5201, 5202	3/8" 1/2"	160	50	92	10.5	90	1/4"	4	263
YG-KZ-5203, 5204	3/8" 1/2"	200	75	92	10.5	90	1/4"	4	260
YG-KZ-5205, 5206	1/4" 1/4"	230	30	92	10.5	90	1/4"	5	155
YG-KZ-5207, 5208	3/8" 1/4"	240	25	90		90	1/4"	3	120

## Air Die Grinder/Air Cut off Tool/Polisher/Air Angle Grinder

**1/4"**  
YG-KZ-2202  
-Handle exhaust  
Packing(pcs/N.W./G.W./cuft):  
20/13.5kgs/14kgs/0.6'



**1/4" Angle Die Grinder**  
YG-KZ-2203  
-Handle exhaust  
Packing(pcs/N.W./G.W./cuft):  
20/15.5kgs/16.5kgs/1.1'



**1/4"**  
YG-KZ-2206  
-Handle exhaust  
Packing(pcs/N.W./G.W./cuft):  
20/13.5kgs/14kgs/0.7'



With 120cm length muffler  
Hose (optional)



**3" Air Cut off Tool**  
YG-KZ-3201  
Wheel Size : 2-7/8" (73mm)  
Packing(pcs/N.W./G.W./cuft):  
20/15kgs/16kgs/1.3'



**7" Angle Sander**  
YG-KZ-1206S  
**7" Angle Polisher**  
YG-KZ-1206P  
Sanding Paper(in/mm) : 7" (180mm)  
Packing(pcs/N.W./G.W./cuft):  
6/16kgs/17kgs/1.75'



**Air Angle Grinder**  
4" YG-KZ-8102  
4-1/2" YG-KZ-8102-1  
5" YG-KZ-8102-5  
Capacity : 4" (101.6mm)  
Packing(pcs/N.W./G.W./cuft):  
10/20kgs/21kgs/1.45'



Model NO.	Free Speed (RPM)	Collet Size	Sound Level dB(A)	Vibration (m/s <sup>2</sup> )	Air pressure (PSI)	Air Inlet (NPT)	Air Exhaust Style	Avg.Air Cons. (CFM)	Over Lenth (mm)
YG-KZ-2202	22,000	1/8"-1/4"(3-6mm)	92	8.1	90	1/4"	Rear	4	168
YG-KZ-2203	18,000	1/8"-1/4"(3-6mm)	91	5.7	90	1/4"	Rear	4	155
YG-KZ-2206	25,000	1/8"-1/4"(3-6mm)	88	15.5	90	1/4"	Rear	4	150
YG-KZ-3201	22,000		92	4.1	90	1/4"		4	
YG-KZ-1206S,P	45,000(S) 25,000(P)				90	1/4"		12	
YG-KZ-8102,(-1),(-5)	11,000				90	1/4"		4.2	

## Air Drill



### 3/8" Composite Reversible Air Drill

YG-KZ-4201F

YG-KZ-4201F-1

Packing(pcs/N.W./G.W./cuft):10/CTN/12kgs/13kgs/0.8'

- Convenient one-hand operation-with special design of forward-reverse " tum-knob" (suitable for right hand or left hand using)
- Aluminum housing with double injection composite for durable using.
- Anti-slip design of grip for comfortable operation with muffler device.



forward-reverse turn-knob  
Pat. No. M443599

Anti-slip design

### 3/8" Reversible Air Drill

YG-KZ-4201

Packing(pcs/N.W./G.W./cuft):  
10/12kgs/13kgs/0.8'



### 1/2" Reversible Air Drill

YG-KZ-4204

Packing(pcs/N.W./G.W./cuft):  
10/18kgs/19kgs/0.8'



Model NO.	Chuck Size	Free Speed (RPM)	Sound Level dB(A)	Avg.Air Cons. (CFM)	Air pressure (PSI)	Air Inlet (PT,NPT)	Vibration (m/s <sup>2</sup> )
YG-KZ-4201F, 4201F-1	3/8"(10mm)	1,800	86	4	90	1/4"	
YG-KZ-4201	3/8"	1,800	86	4	90	1/4"	2.4
YG-KZ-4204	1/2"	800	95	4	90	1/4"	0.24

## Air Tools Kit Set/ Air Die Grinder Kit Set

### 1/2" Impact Wrench Kit

YG-KZ-504K

Packing(Sets/N.W./cuft):  
4/17kgs/18kgs/1.2'

- 1 pc 1/2" Air Impact Wrench
- 10 pcs Sockets
- 1 pc Mini Olier
- 1 pc Hex. Wrench
- 1 pc 5" Extension Bar
- 1 pc Oil Pot
- 1 pc Plug
- 1 pc Blow Case



### 190mm Air Hammer Kit

YG-KZ-106K

Packing(Sets/N.W./cuft):  
5/16kgs/17kgs/1.7'

- 1 pc 190mm Air Hammer
- 5 pcs 7" Chisels
- 1 pc Oil Pot
- 1 pc Plug
- 1 pc Retainer Spring
- 1 pc Blow Case



### 250mm Heavy Duty Air Hammer Kit

YG-KZ-112K

Packing(Sets/N.W./cuft):  
5/23kgs/24kgs/1.2'

- 1 pc 250mm H.D. Air Hammer
- 5 pcs 10" Chisels
- 1 pc Plug
- 1 pc Retainer Spring
- 1 pc Blow Case



### 1/4" Air Die Grinder Kit Set

YG-KZ-2202K

Packing(Sets/N.W./cuft):  
20/26kgs/28kgs/2.1'

- 1 pc 1/4" Air Die Grinder
- 10 pcs Mounted Stones
- 2 pc Spanners
- 1 pc Plug
- 1 pc Collet
- 1 pc Blow Case



### 1/4" Air Die Grinder Kit Set

YG-KZ-2203K

Packing(Sets/N.W./cuft):  
20/26kgs/28kgs/2.1'

- 1 pc 1/4" Air Die Grinder
- 10 pcs Mounted Stones
- 2 pc Spanners
- 1 pc Plug
- 1 pc Collet
- 1 pc Standing Pad
- 1 pc Blow Case



### 1/4" Air Die Grinder Kit Set

YG-KZ-2206K

Packing(Sets/N.W./cuft):  
20/18kgs/20kgs/2.1'

- 1 pc 1/4" Air Die Grinder
- 10 pcs Mounted Stones
- 2 pc Spanners
- 1 pc Plug
- 1 pc Collet
- 1 pc Blow Case



## Sander / Grinder 研磨機/砂磨機系列



**FINGER SANDER 往覆式研磨機**  
YG-SM-01



**DIAMOND SANDER 偏心式砂磨機**  
YG-SM-02



**GRINDER 高速砂輪機**  
YG-SM-03



**3\" data-bbox="123 368 289 395"/>**



**3\" data-bbox="398 368 567 395"/>**



**GRINDER 高速砂輪機**  
YG-SM-03C



**FINGER SANDER 往覆式研磨機**  
YG-SM-01N



**DIAMOND SANDER 偏心式砂磨機**  
YG-SM-02N



**GRINDER 高速砂輪機**  
YG-SM-03N



**3\" data-bbox="123 638 289 663"/>**



**GRINDER 高速砂輪機**  
YG-SM-03CN

Model NO.	Free Speed (RPM) 無載轉速	Air Inlet (inch) 進氣口尺寸	Air Pressure (Kg/cm <sup>2</sup> ) 操作壓力	Avg Air Cons. (m <sup>3</sup> /min) 空氣消耗量	Net Weight (g) 淨重	Tool Length (mm) 機身長度	Orbital Diameter SM-01(mm) 偏擺量	Orbital Diameter SM-01A(mm) 偏擺量	Orbital Diameter SM-01B(mm) 偏擺量	Collet Size (mm/inch) 夾具尺寸
YG-SM-01	13,000	1/4"	6	0.4	830	200	3	1.5	0.75	
YG-SM-02	15,000	1/4"	6	0.4	700	160	3	1.5	0.75	
YG-SM-03	15,000	1/4"	6	0.4	680	160		4.5		
YG-SM-03A	2,500	1/4"	6	0.4	810	160		9		
YG-SM-03B	2,500	1/4"	6	0.4	810	160		3		6mm(1/4")
YG-SM-03C	15,000	1/4"	6	0.4	810	160		4.5		
YG-SM-01N	13,000	1/4"	6	0.4	830	200	3	1.5	0.75	
YG-SM-02N	15,000	1/4"	6	0.4	700	160	3	1.5	0.75	
YG-SM-03N	15,000	1/4"	6	0.4	680	160				
YG-SM-03AN	2,500	1/4"	6	0.4	810	160				
YG-SM-03CN	15,000	1/4"	6	0.4	810	160				6mm(1/4")



## Mini Sander 迷你研磨機



MINI ANGLE SANDER 迷你拋光研磨機  
YG-SM-203



MINI ANGLE SANDER 迷你拋光研磨機  
YG-SM-203A



MINI ANGLE SANDER 迷你拋光研磨機  
YG-SM-203B



MINI ANGLE SANDER 迷你拋光研磨機  
YG-SM-203C



MINI ANGLE SANDER 迷你拋光研磨機  
YG-SM-203D



ANGLE SANDER 研磨機  
YG-SM-701

Model NO.	Free Speed (RPM) 無載轉速	Air Inlet (inch) 進氣口尺寸	Air Pressure (Kg/cm <sup>2</sup> ) 操作壓力	Avg. Air Cons. (L/min) 空氣消耗量	Net Weight (g) 淨重	Tool Length (mm) 機身長	Orbital Diameter SM-203(mm) 偏擺量	Collet Size (mm/inch) 夾具尺寸
YG-SM-203	18,000	1/4"	6	180	360	153	0.75	
YG-SM-203A	18,000	1/4"	6	180	360	153		日規6mm~3mm 美規1/4"~1/8"
YG-SM-203B	18,000	1/4"	6	180	360	153		
YG-SM-203C	18,000	1/4"	6	180	360	153		
YG-SM-203D	16,000	1/4"	6	180	440	153		
YG-SM-701	10,000	1/4"	6		520	180		


**DIE GRINDER 高速研磨機**  
**YG-SM-101**

**DIE GRINDER 高速研磨機**  
**YG-SM-102**

**DIE GRINDER 高速研磨機**  
**YG-SM-210**

**DIE GRINDER 高速研磨機**  
**YG-SM-201**

**DIE GRINDER 高速研磨機**  
**YG-SM-301**

**6mm DIE GRINDER 中型高速研磨機**  
**YG-SM-216R**

**6mm DIE GRINDER 中型高速研磨機**  
**YG-SM-216**

**90° AIR MICRO GRINDER**  
**高速拋光研磨機**  
**YG-SM-211**

**120° AIR MICRO GRINDER**  
**高速拋光研磨機**  
**YG-SM-212**

Model NO.	Free Speed (RPM) 無載轉速	Air Inlet (inch) 進氣口尺寸	Air Pressure (Kg/cm <sup>2</sup> ) 操作壓力	Avg. Air Cons. (L/min) 空氣消耗量	Net Weight (Kg) 淨重	Tool Length (mm) 機身長度	Collet Size (mm/inch) 夾具尺寸	Tool Diameter (mm) 機身外徑	Hose Length (mm) 排氣管長度	Exhaust System (mm/inch) 排氣方式
YG-SM-101	60,000	1/4"	6	75	0.24	140	3mm(3/32")(1/8")	16.5	1,500	Rear
YG-SM-102	60,000	1/4"	6	75	0.22	130	3mm(3/32")(1/8")	16	1,500	Rear
YG-SM-210	60,000	1/4"	6	75	0.22	130	3mm(3/32")(1/8")	19	1,500	Rear
YG-SM-201	60,000	1/4"	6	75	0.24	130	3mm(3/32")(1/8")	18	1,500	Rear
YG-SM-301	70,000	1/4"	6	75	0.24	140	3mm(3/32")(1/8")	16.5	1,500	Rear
YG-SM-216R	30,000	1/4"	6	75	0.27	145	6mm	26.5	1,500	Rear
YG-SM-216	30,000	1/4"	6	75	0.27	145	6mm	26.5	1,500	Rear
YG-SM-211	21,000	1/4"	6	SCFM 9 1/sec=4	230(g)	160				
YG-SM-212	21,000	1/4"	6	SCFM 9 1/sec=4	230(g)	160				

## Needle Scaler / Flux Chipper / Angle Drill 除鏽機/鑿刀機/氣鑽機系列



**NEEDLE SCALER** 直型針狀除鏽機  
YG-SM-04



**FLUX CHIPPER** 直型氣動鑿刀  
YG-SM-04A



**NEEDLE SCALER** 槍型針狀除鏽機  
YG-SM-05



**FLUX CHIPPER** 槍型氣動鑿刀  
YG-SM-05A



**90° ANGLE DRIL** 90度氣鑽機  
YG-SM-215



**90° ANGLE DRIL** 90度小頭氣鑽機  
YG-SM-215S

## Other Tool 其他工具系列



**AIR FILE & SAW**  
往覆式氣動銼刀機  
YG-SM-205

**AIR FILE & SAW**  
往覆式氣動銼刀機  
YG-SM-310



**PNEUMATIC WATER SANDER**  
石材用注水式拋光砂輪機  
YG-SM-209

建議使用後要將水磨片之水分排乾，以防劣化  
使用磨光角度15°~20°，  
研磨壓力：1~3kg/cm<sup>2</sup>



**PNEUMATIC WATER SANDER REAR EXHAUST**  
後排注水式拋光砂輪機  
YG-SM-209R

建議使用後要將水磨片之水分排乾，以防劣化  
使用磨光角度15°~20°，  
研磨壓力：1~3kg/cm<sup>2</sup>

Model NO.	Free Speed (RPM) 無載轉速	Air Inlet (inch) 進氣口尺寸	Air Pressure (Kg/cm <sup>2</sup> ) 操作壓力	Avg. Air Cons. (m <sup>3</sup> /min) 空氣消耗量	Net Weight (Kg) 淨重	Tool Length (mm) 機身長度	File Shake Dia (mm) 銼刀徑	Stroke Length (mm) 行程	Exhaust System (mm/inch) 排氣方式	Collet Size (mm/inch) 夾具尺寸
YG-SM-04	3,000b/min	1/4"	6	0.2	2.59	385		1.5		
YG-SM-04A	3,000b/min	1/4"	6	0.2	1.79	230		1.5		
YG-SM-05	3,000b/min	1/4"	6	0.2	2.67	333				
YG-SM-05A	3,000b/min	1/4"	6	0.2	1.69	303				(5/16") (1/4")
YG-SM-215	3,000	1/4"	6	300L/min	960(g)	280				1/4" X28T
YG-SM-215S	3,000	1/4"	6	300L/min	960(g)	280				
YG-SM-205	3,400spm	1/4"	6	0.2	520(g)	700	5	5		
YG-SM-310	4,700spm	1/4"	6	0.4	830(g)	800	10	10		
YG-SM-209	4,500	1/4"	6	280L/min	1.53	230			Front	
YG-SM-209R	4,500	1/4"	6	280L/min	1.5	190			Rear	

## Pressure Tank

本機適用於噴漆、烤漆、鞋面、木器、藤器、皮革之表面塗裝，供輸送塗料之用，另珐瑯釉、化學液體、食品、高黏度劑之輸送，亦適用之。

With this versatile air tank, Almost any professional painting result can be easily carried out. What's more, special materials such as enamel paint, chemical liquid, glue, fluid food, sticky material...ect can also be transported as smoothly as required.



2-1/2 Gallon  
YG-AT-10E




2-1/2 Gallon  
YG-AT-10H



2-1/2 Gallon  
YG-AT-10HT



2-1/2 Gallon  
YG-AT-10A

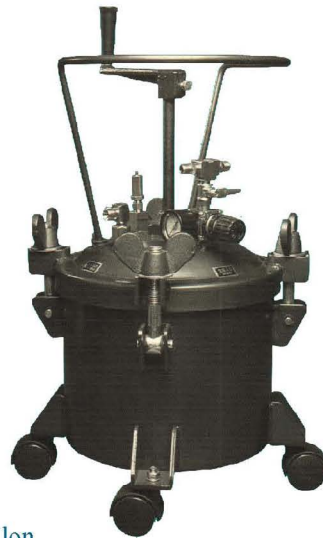

2-1/2 Gallon  
YG-AT-10M

Model NO.	(Liters) Capacity 容量	Agitating Style 攪拌方式	Net WT. 機械淨重	Gross WT. 裝箱毛重	CUFT.(L/W/H) (mm) 材料長/寬/高
YG-AT-10E	10L	None	13	14.2	1.6才 306x306x495
YG-AT-10H	10L	None	12	13.5	1.6才 306x306x495
YG-AT-10HT	10L	None	8.9	9.8	1.6才 306x306x525
YG-AT-10A	10L	氣動馬達驅動Air Motor	16.5	17.7	1.8才 306x306x572
YG-AT-10M	10L	手動搖柄轉動Manual	15	16.2	1.8才 306x306x612



5 Gallon  
YG-AT-20A



5 Gallon  
YG-AT-20M

Model NO.	(Liters) Capacity 容量	Agitating Style 攪拌方式	Net WT. 機械淨重	Gross WT. 裝箱毛重	CUFT.(L/W/H) (mm) 材料長/寬/高
YG-AT-20A	20L	氣動馬達驅動Air Motor	24.5	27	3.7才 415x358x723
YG-AT-20M	20L	手動搖柄轉動Manual	23.1	25.7	3.7才 415x358x763



10 Gallon  
YG-AT-40A



10 Gallon  
YG-AT-40M

Model NO.	(Liters) Capacity 容量	Agitating Style 攪拌方式	Net WT. 機械淨重	Gross WT. 裝箱毛重	CUFT.(L/W/H) (mm) 材料長/寬/高
YG-AT-40A	40L	氣動馬達驅動Air Motor	27.3	30	4.5才 415x358x875
YG-AT-40M	40L	手動搖柄轉動Manual	26	28.8	4.5才 415x358x915



15 Gallon  
YG-AT-60A



15 Gallon  
YG-AT-60M

Model NO.	(Liters) Capacity 容量	Agitating Style 攪拌方式	Net WT. 機械淨重	Gross WT. 裝箱毛重	CUFT.(L/W/H) (mm) 材料長/寬/高
YG-AT-60A	60L	氣動馬達驅動Air Motor	33	36.4	7.5才 490x470x910
YG-AT-60M	60L	手動搖柄轉動Manual	31.6	35	7.5才 490x470x950

## Pressure Tank

20 Gallon  
YG-AT-80A



20 Gallon  
YG-AT-80M



Model NO.	(Liters) Capacity 容量	Agitating Style 攪拌方式	Net WT. 機械淨重	Gross WT. 裝箱毛重	CUFT.(L/W/H) (mm) 材料長/寬/高
YG-AT-80A	80L	氣動馬達驅動 Air Motor	40	43.4	8.5才 490x470x1030
YG-AT-80M	80L	手動搖柄轉動 Manual	38.7	42.1	8.5才 490x470x1060



10L  
YG-AT-10HSS



10L  
YG-AT-10AHSS



20L  
YG-AT-20HSS



20L  
YG-AT-20AHSS

Model NO.	Capacity	Work Pressure	Tank Lid	Tank Body	Net WT.	Gross WT.	CUFT.(L/W/H) (mm)
YG-AT-10HSS	10L	4.1 bar(60psi)	T/3.5mm I.D./279mm O.D./287mm	T/2mm H/246mm I.D./265mm O.D./276mm	11.4	12.6	1.6才 290x290x456
YG-AT-10AHSS	10L	4.1 bar(60psi)	T/3.5mm I.D./279mm O.D./287mm	T/2mm H/246mm I.D./265mm O.D./276mm	16	17.2	1.8才 290x290x516
YG-AT-20HSS	20L	4.1 bar(60psi)	T/5mm I.D./334mm O.D./344mm	T/2mm H/421mm I.D./317mm O.D./327mm	19.4	21.4	3.7才 410x325x736
YG-AT-20AHSS	20L	4.1 bar(60psi)	T/5mm I.D./334mm O.D./344mm	T/2mm H/421mm I.D./317mm O.D./327mm	19.5	21.5	3.7才 410x325x736

# AIR-POWERED GUN WASHER/RECYCLER 噴漆槍洗淨機



YG-39500

最大工作壓力	Maximum working air pressure.	100PSI (7.2Kg/cm <sup>2</sup> )
正常使用壓力	Working air pressure range.	40~60PSI(3~4 Kg/cm <sup>2</sup> )
每分鐘振動次數	Maximum air valve speed.(40PSI)	160 cycles/min
風量與液體比例	Compression ratio of air to liquid.	1:1
最大液體抽取量	Maximum liquid flow.	5 GPM(19LPM) water tested (3mm)
噴槍與容器放置量	Gun capacity.	2
進氣口	Air inlet port.	1/4"PT
液體進出口	Liquid inlet/ou tlet port.	3/8" PT
泵浦材質	Pump body material.	Aluminum alloy
泵浦重量	Pump weight.	2.6 KGS
淨重	Net weight.	36.5 KGS
整體尺寸	Overall size.	645X465X1 110mm
框架(上蓋)白鐵	Lid cover material.	Stainless

- *Ultra Fine Atomization, highly defined*
- *Suitable for Waterbone Paints*
- *Wide Stable Spray Pattern*
- *Perfect for the application of base and clearcoats*
- *Stainless Nozzle and Needle*
- *High Transfer Efficiency Rate > 65%*  
*Coherence HVLP 83% , LVMP 75% , LVLP 88%*  
*100 % Spray Pattern Check*

- 優質霧化技術，減少過噴，節省漆料
- 耗風量低，使用彈性大
- 噴幅大，型狀穩定，霧化均勻，提高生產力
- 流線造型，符合人體工學，減少操作疲勞
- 結構緊密堅固，持久耐用
- 所有零件台灣生產，出廠前皆手工調校測試
- 適用於各種溶劑型及水性漆的噴槍
- 使用距離15~20 cm
- 高轉換效率，高附著力  
 HP 高壓大於65% ， HVLP 環保型約83% ，  
 LVMP 中壓 約75% ， LVLP 環保優型 約88%



-台灣艾普牌氣動工具-

NO. 9, Alley 5, Lane 437, Da-Feng Rd., 41263 Da-Li, Taichung, Taiwan

台灣台中市大里區三興街11號

TEL: 886-4-24073996 FAX:886-4-24073956

E-mail:trade@alta-pro.com.tw Http://www.alta-pro.com.tw